


Features

- ✓ IP20
- ✓ CRI>83
- ✓ Durable
- ✓ High Safety
- ✓ Wide Range of Use

Benefits


- ✓ High Energy Saving
- ✓ High Efficiency
- ✓ Eye Protection
- ✓ Long Life Time
- ✓ Private Mold

Application

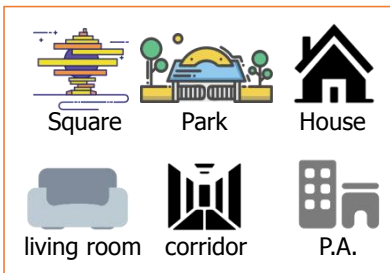

Certificate

IEC 60598

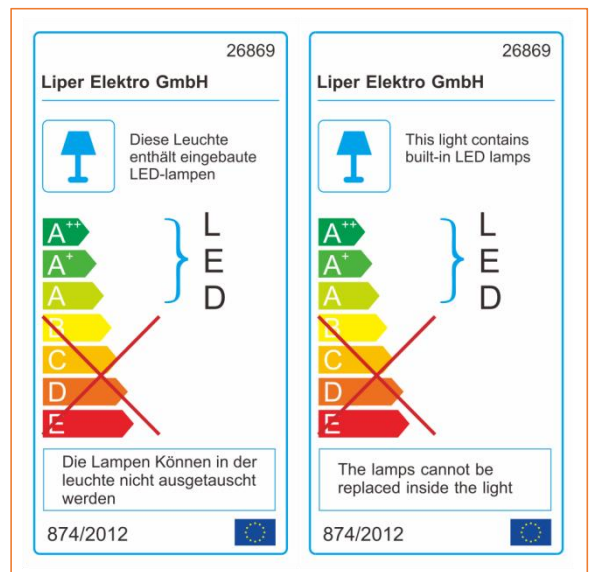

Cutting Size

LPSTL-20A01	LPSTL-25A01	LPSTL-30A01	LPSTL-40A01

Specifications

Item Number	Power (W/M)	Power Factor	Lumen (lm)	LED Line	LEDs pcs	CRI	Color Temperature	Life Time (hrs)
LPSTL-20A01	20W/M	>0.9	2400LM/M	1 line	240	>83	CW/NW/WW	30000
LPSTL-25A01	25W/M	>0.9	3000LM/M	2 lines	240	>83	CW/NW/WW	30000
LPSTL-30A01	30W/M	>0.9	3600LM/M	3 lines	360	>83	CW/NW/WW	30000
LPSTL-40A01	40W/M	>0.9	4800LM/M	4 lines	480	>83	CW/NW/WW	30000



Technical Specifications

On/Off Cycles	100,000
Color Tolerance Adjustment (SDCM)	<6
IP	20
Class	III
LED Driver	Non
Pressure Resistant	500V
Output Voltage	24V

Temperature

Operating Temperature	-15°C ~ 50 °C
Testing Temperature	-20°C ~ 95 °C

Packing Data

Item No	PCS/CTN	Gross Weight KG	Net Weight KG	Length CM	Width CM	Height CM
LPSTL-20A01	5m/r, 40r/c	14	13	35	33	17.5
LPSTL-25A01	5m/r, 40r/c	15	14	45	33	17.5
LPSTL-30A01	5m/r, 40r/c	16	15	38.5	33	33.5
LPSTL-40A01	5m/r, 40r/c	17	16	48.5	33	33.5

Dimensional Drawing

Item No	Power	Width (mm)	Cutting Size (mm)
LPSTL-20A01	20W/M	10	30
LPSTL-25A01	25W/M	15	50
LPSTL-30A01	30W/M	30	33
LPSTL-40A01	40W/M	40	50

Power Supply

100W	200W	200W	400W
24V/4A	24V/8A	24V/12.5A	24V/16.7A

Packing Data

Item No	PCS/CTN	Gross Weight KG	Net Weight KG	Length CM	Width CM	Height CM
100W	50	7.74	6.85	65	15.8	12.2
200W	50	10	9	65	20	12
300W	50	12.1	10.75	65	20	12
400W	50	13.67	12.5	65	26	12

