


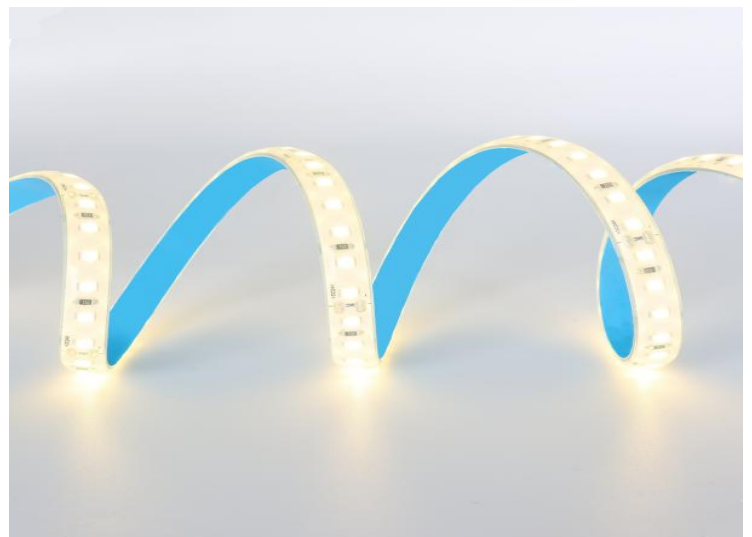


Features

- ✓ IP68
- ✓ CRI>83
- ✓ Durable
- ✓ High Safety
- ✓ Wide Range of Use


Benefits

- ✓ High Energy Saving
- ✓ High Efficiency
- ✓ Eye Protection
- ✓ Long Life Time
- ✓ Private Mold


Application

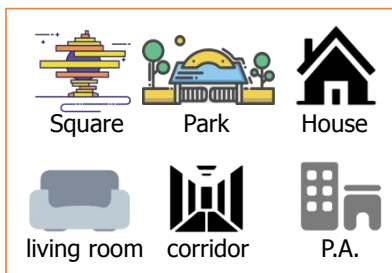

Certificate

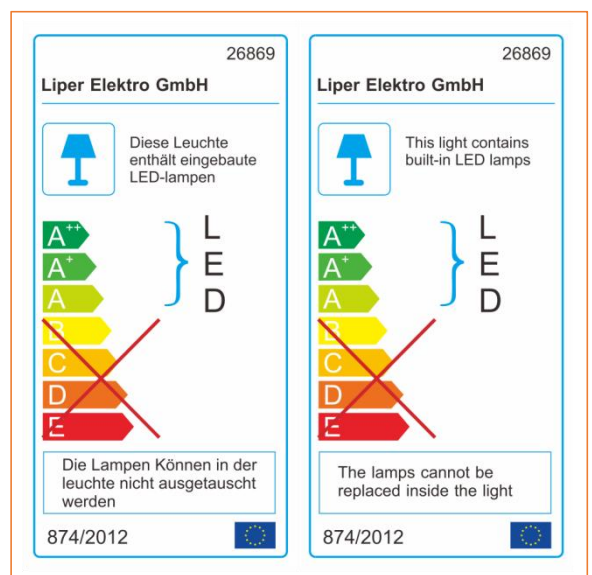

Cutting Size



Specifications

Item Number	Power (W/M)	Power Factor	Lumen (lm)	LED Line	LEDs pcs	CRI	Color Temperature	Life Time (hrs)
LPSTL-10A01	10W/M	>0.9	1250LM/M	1 line	120	>83	Cool White	30000
LPSTL-10A01	10W/M	>0.9	1250LM/M	1 line	120	>83	Natural White	30000
LPSTL-10A01	10W/M	>0.9	1250LM/M	1 line	120	>83	Warm White	30000



Technical Specifications

On/Off Cycles	100,000
Color Tolerance Adjustment (SDCM)	<6
IP	68
Class	III
LED Driver	Non
Output Voltage	24V

Temperature

Operating Temperature	-15°C ~ 50 °C
Testing Temperature	-20°C ~ 95 °C

Packing Data

Item No	PCS/CTN	Gross Weight KG	Net Weight KG	Length CM	Width CM	Height CM
LPSTL-10A01	100	7.6	6.6	30.5	22.5	30.5

10METER/ROLL

10ROLL/CARTON

Dimensional Drawing

Item No	Power	Width (mm)	Cutting Size (mm)
LPSTL-10A01	10W/M	8	50

Driver

NO.	Picture	Model No.	Power	Voltage/Hz	IP	PCS/CTN
1		DM-400F-24V	400W	24V/16.7A	IP68	16
2		DM-300F-24V	300W	24V/12.5A	IP68	16
3		DM-200F-24V	200W	24V/8.33A	IP68	20
4		DM-100F-24V	100W	24V/4.17A	IP68	30
5		DM-60F-24V	60W	24V/2.5A	IP68	40