



Body Color



LOW
MAINTENANCE



ANTI-RUST
FINISH



ANTI-SHOCK
BODY



FULLY
RECYCLABLE




EUROPEAN
CERTIFIED




PROTECTION
LEVEL



UV RAY
TREATED



E27 LAMP
BASE



CLASS II
DOUBLE
INSULATION

Lights Material

Material

PP+PC

Temperature

Operating Temperature

-45°C ~ 50 °C

Testing Temperature


-45°C ~ 95 °C




For technical information contact the Technical Assistance Service or visit liperlighting.com

Technical Information

Dimensional Drawing

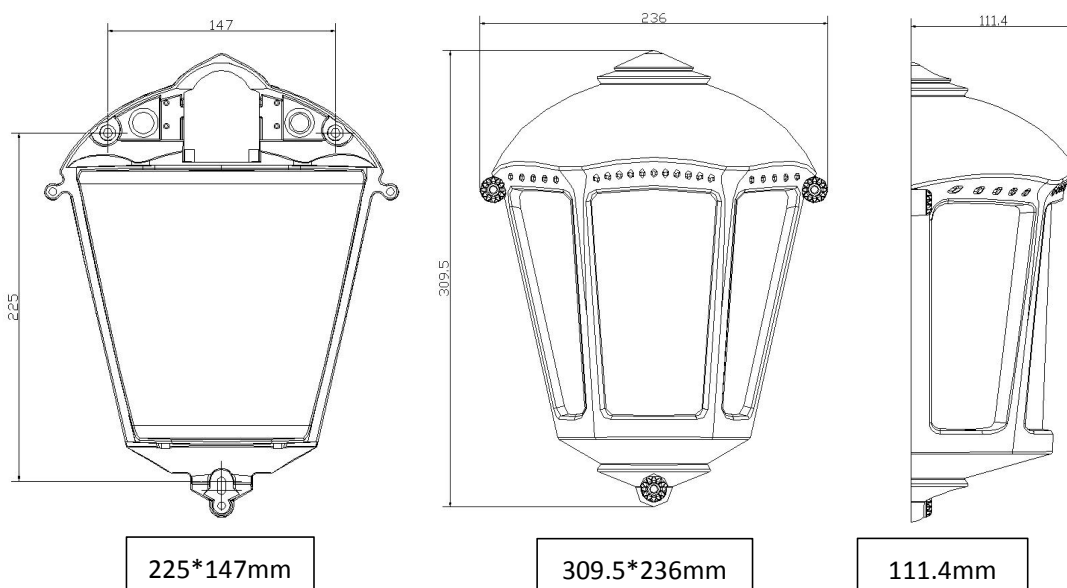

Liper Bulb can be installed (E27)

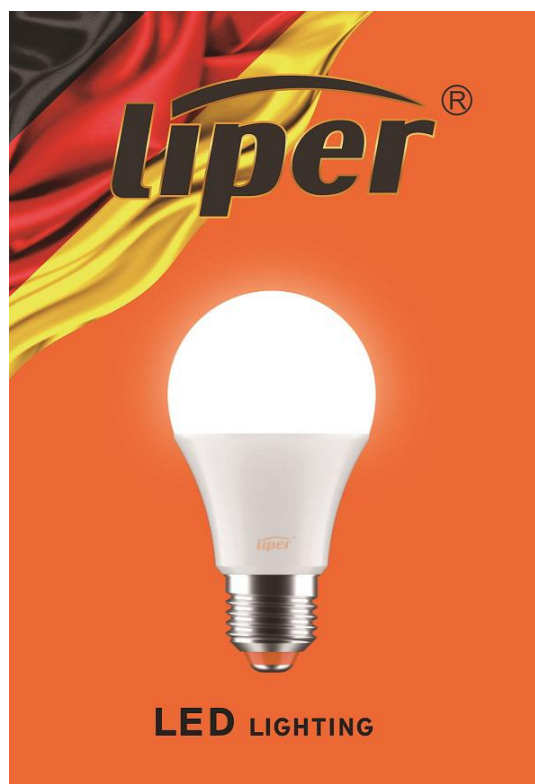

Modell Model	Leistung Power	Produktgröße Product Size
LPQP5DLED-01	● 5W	Ø 60X106mm
LPQP7DLED-01	● 7W	Ø 60X106mm
LPQP9DLED-01	● 9W	Ø 60X108mm
LPQP12DLED-01	● 12W	Ø 60X110mm