


Goniophotometer Test Report

Measured Para U: 216.4V I: 177.0mA P: 20.11W PF: 0.525 Test LM: 1803.87lm						
Lamp Name: WATER PROOF FIXTURE			Lamp Type:		Weight(kg):	
Lamp ID: SY6120-H			Lamp Spec:		Shape Size:	
Manufactory: LIPER			Sur(m^2):		Protect Angle(Deg):	
Light Source Data			Photometric Data			
Model	SY6120-H		Peak Value(cd)	448.2	Efficiency(lm/w)	89.7
Nominal P(w)		1.0	Position	90.0,5.0	UP(C0-C180)	7.9
Rated Volt(v)		220.0	Total Flux(lm)	1803.87	Down(C0-C180)	47.0
Rated Flux(lm)		1.0	Up Flux Rate(%)	13.3	UP(C180-C360)	5.4
Illuminant QTY		1	Dw Flux Rate(%)	86.7	Down(C180-C360)	39.7

Planar Intensity Distribution Curve

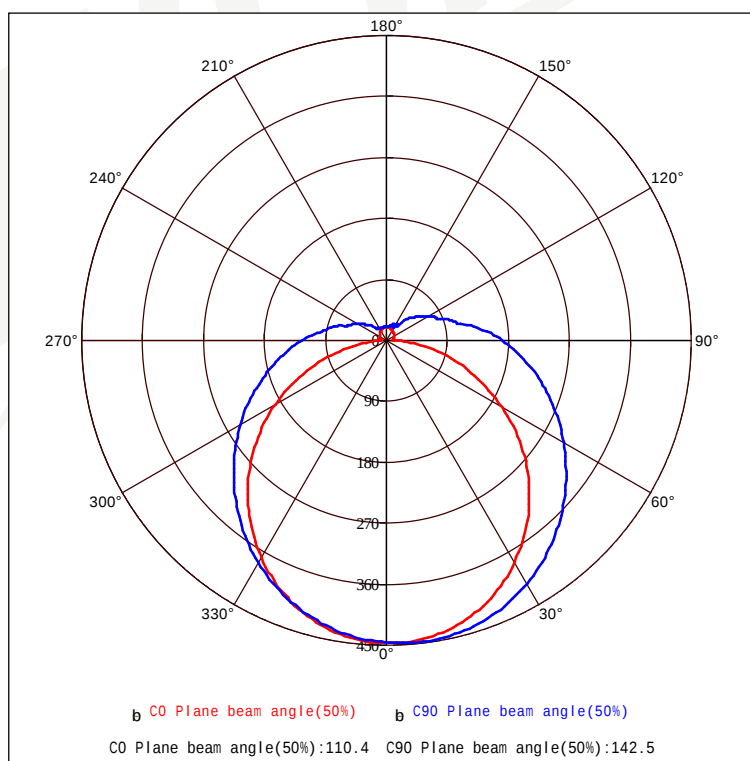

Gama Angle Range:-180 - 180(Deg)

Gama interval(Deg): 1

Temperature(Deg): 30

Tester: zxcg

Distance(m): 7.070

Test System: ZWL Goniophotometer System V3.0

C Angle Range:0 - 180(Deg)

C interval(Deg): 45


Humidity(%):60

Date: 2023-10-30

Remark:

Measured Para U: 216.4V I: 177.0mA P: 20.11W PF: 0.525 Test LM: 1803.87lm		
Lamp Name: WATER PROOF FIXTURE	Lamp Type:	Weight(kg):
Lamp ID: SY6120-H	Lamp Spec:	Shape Size:
Manufactory: LIPER	Sur(m^2):	Protect Angle(Deg):

Planar IsoCandela Curve

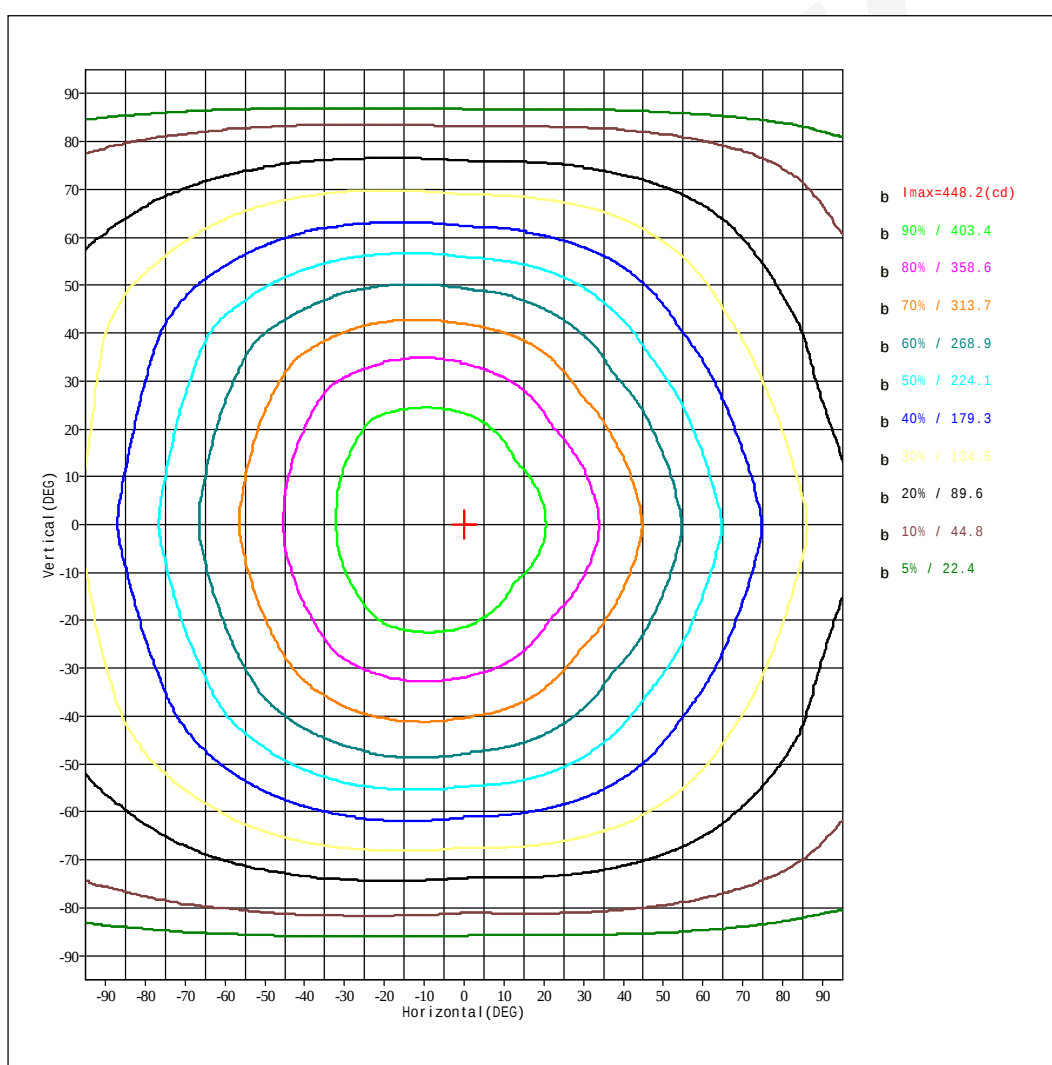

Gama Angle Range:-180 - 180(Deg)

Gama interval(Deg): 1

Temperature(Deg): 30

Tester: zyg

Distance(m): 7.070

Test System: ZWL Goniophotometer System V3.0

C Angle Range:0 - 180(Deg)

C interval(Deg): 45


Humidity(%):60

Date: 2023-10-30


Remark:

Measured Para U: 216.4V I: 177.0mA P: 20.11W PF: 0.525 Test LM: 1803.87lm		
Lamp Name: WATER PROOF FIXTURE	Lamp Type:	Weight(kg):
Lamp ID: SY6120-H	Lamp Spec:	Shape Size:
Manufactory: LIPER	Sur(m^2):	Protect Angle(Deg):

Spacial ISOLUX Curve

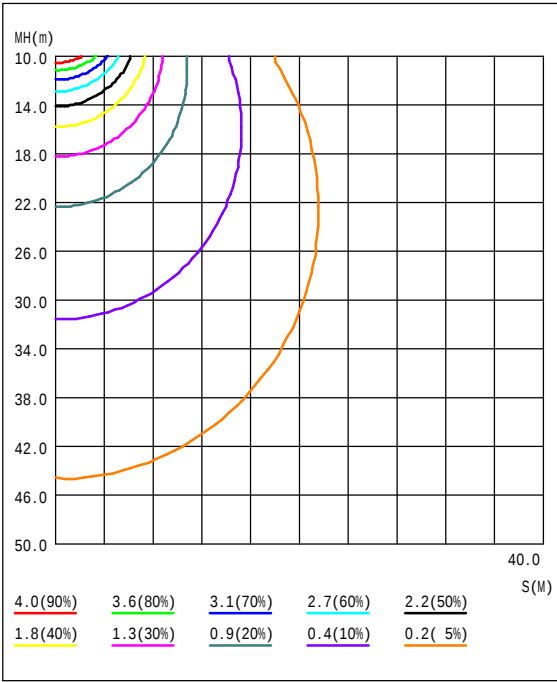

Planar ISOLUX Curve

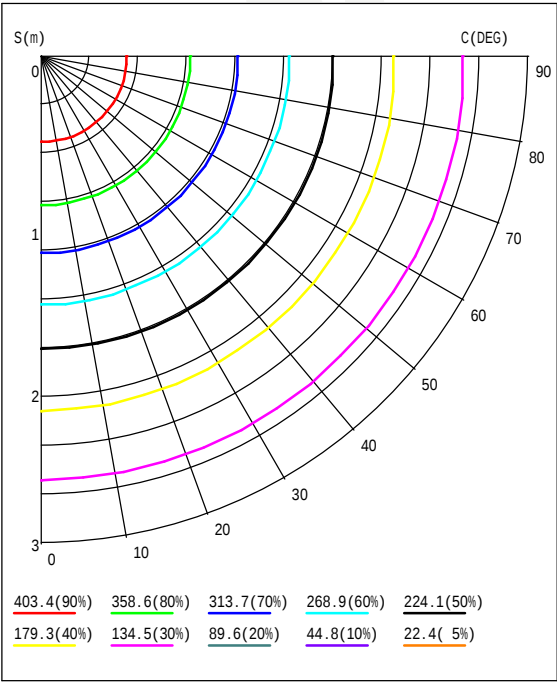

Gama Angle Range:-180 - 180(Deg)

Gama interval(Deg): 1

Temperature(Deg): 30

Tester: zxcg

Distance(m): 7.070

Test System: ZWL Goniophotometer System V3.0

C Angle Range:0 - 180(Deg)

C interval(Deg): 45

Humidity(%):60

Date: 2023-10-30


Remark:

Measured Para U: 216.4V I: 177.0mA P: 20.11W PF: 0.525 Test LM: 1803.87lm		
Lamp Name: WATER PROOF FIXTURE	Lamp Type:	Weight(kg):
Lamp ID: SY6120-H	Lamp Spec:	Shape Size:
Manufactory: LIPER	Sur(m^2):	Protect Angle(Deg):

Luminance Limit Curve

Aver Luminance(cd/m²m)									
Gm(Deg)	45	50	55	60	65	70	75	80	85
C0	29395.6	26303.1	23030.5	19389.6	15789.2	12688.2	9471.6	6076.7	3256.0
C90	36285.5	34268.1	32139.3	30005.4	27809.1	25540.8	23402.9	21139.1	18997.8

Glare									
Glare	Class	Illuminance(lx)							
1.15	A	2000	1000	500	<=300				
1.5	B		2000	1000	500	<=300			
1.85	C			2000	1000	500	<=300		
2.2	D				2000	1000	500	<=300	
2.55	E					2000	1000	500	<=300
		a	b	c	d	e	f	g	h

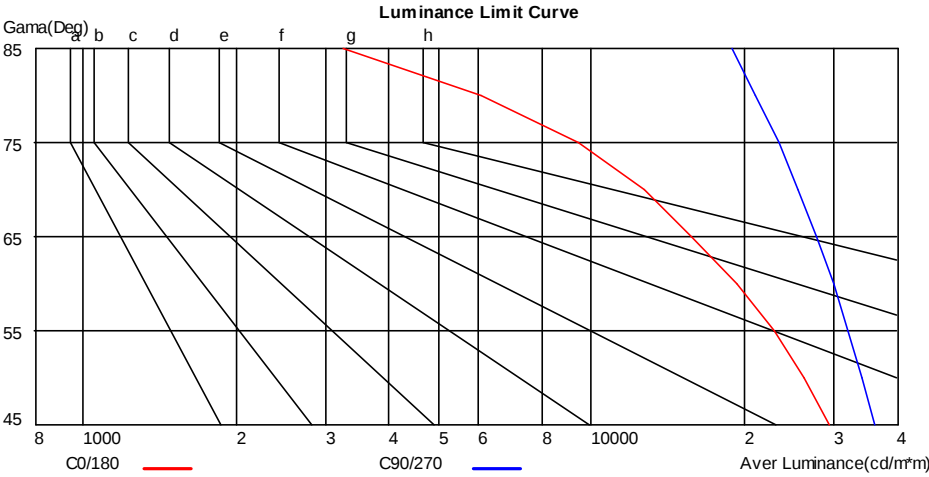

Gama Angle Range:-180 - 180(Deg)

Gama interval(Deg): 1

Temperature(Deg): 30

Tester: zxg

Distance(m): 7.070

Test System: ZWL Goniophotometer System V3.0

C Angle Range:0 - 180(Deg)

C interval(Deg): 45


Humidity(%):60

Date: 2023-10-30

Remark:

Measured Para U: 216.4V I: 177.0mA P: 20.11W PF: 0.525 Test LM: 1803.87lm		
Lamp Name:WATER PROOF FIXTURE	Lamp Type:	Weight(kg):
Lamp ID: SY6120-H	Lamp Spec:	Shape Size:
Manufactory: LIPER	Sur(m ²):	Protect Angle(Deg):

Average Illumination

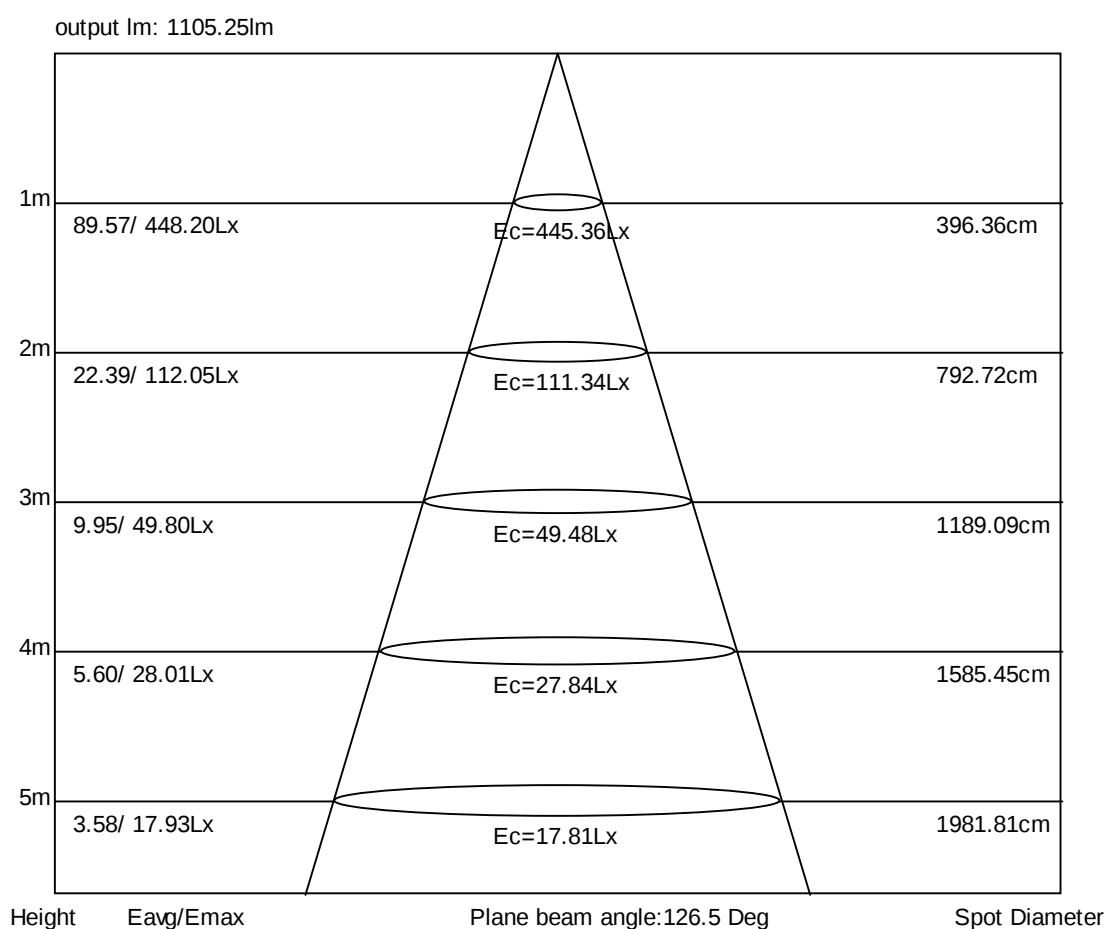

Gama Angle Range:-180 - 180(Deg)

Gama interval(Deg): 1

Temperature(Deg): 30

Tester: zxcg

Distance(m): 7.070

Test System: ZWL Goniophotometer System V3.0

C Angle Range:0 - 180(Deg)

C interval(Deg): 45


Humidity(%):60

Date: 2023-10-30

Remark:

Measured Para U: 216.4V I: 177.0mA P: 20.11W PF: 0.525 Test LM: 1803.87lm		
Lamp Name: WATER PROOF FIXTURE	Lamp Type:	Weight(kg):
Lamp ID: SY6120-H	Lamp Spec:	Shape Size:
Manufactory: LIPER	Sur(m^2):	Protect Angle(Deg):

Lamp Probability Curve

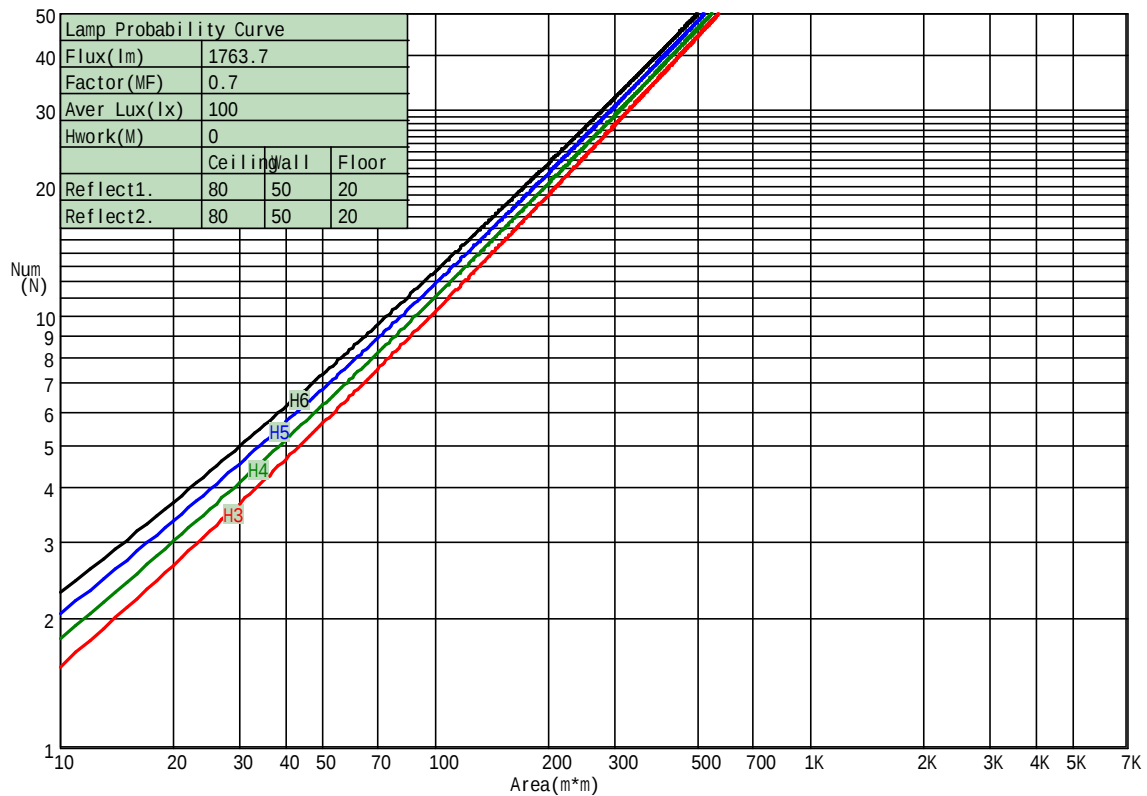

Gama Angle Range:-180 - 180(Deg)

Gama interval(Deg): 1

Temperature(Deg): 30

Tester: zxcg

Distance(m): 7.070

Test System: ZWL Goniophotometer System V3.0

C Angle Range:0 - 180(Deg)

C interval(Deg): 45

Humidity(%):60

Date: 2023-10-30

Remark:

Measured Para U: 216.4V I: 177.0mA P: 20.11W PF: 0.525 Test LM: 1803.87lm		
Lamp Name: WATER PROOF FIXTURE	Lamp Type:	Weight(kg):
Lamp ID: SY6120-H	Lamp Spec:	Shape Size:
Manufactory: LIPER	Sur(m^2):	Protect Angle(Deg):

UF Table

Ceiling	0.8	0.8	0.8	0.7	0.7	0.7	0.5	0.5	0.5
Wall	0.7	0.5	0.3	0.7	0.5	0.3	0.7	0.5	0.3
Floor	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2
0.60	38	21	10	36	19	9	31	17	8
0.80	46	28	16	43	26	15	37	23	13
1.00	52	33	20	48	31	19	41	27	16
1.25	57	38	24	52	35	22	45	30	19
1.50	60	41	26	55	38	25	47	33	21
2.00	64	45	30	59	42	28	50	36	24
2.50	67	48	32	62	44	30	52	37	25
3.00	69	49	33	63	46	31	53	38	26
4.00	71	51	35	65	47	32	54	40	27
5.00	72	53	36	66	48	33	55	40	27

CoEfficients Utilization

Ceiling(%)		0			0			0			0			0	
Wall(%)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Floor (%)		0			0			0			0			0	
0	1.16	1.16	1.16	1.12	1.12	1.12	1.04	1.04	1.04	0.96	0.96	0.96	0.9	0.9	0.9
1	0.97	0.92	0.88	0.94	0.89	0.85	0.87	0.83	0.8	0.81	0.78	0.75	0.75	0.73	0.7
2	0.84	0.76	0.69	0.81	0.74	0.68	0.75	0.69	0.64	0.69	0.65	0.61	0.65	0.61	0.57
3	0.73	0.64	0.57	0.7	0.62	0.55	0.65	0.58	0.53	0.61	0.55	0.5	0.56	0.52	0.48
4	0.64	0.55	0.48	0.62	0.53	0.46	0.58	0.5	0.44	0.54	0.47	0.42	0.5	0.45	0.4
5	0.57	0.47	0.41	0.55	0.46	0.4	0.51	0.44	0.38	0.48	0.41	0.36	0.45	0.39	0.35
6	0.51	0.42	0.35	0.49	0.41	0.34	0.46	0.39	0.33	0.43	0.37	0.32	0.4	0.35	0.3
7	0.46	0.37	0.31	0.45	0.36	0.3	0.42	0.34	0.29	0.39	0.33	0.28	0.37	0.31	0.27
8	0.42	0.33	0.27	0.41	0.32	0.27	0.38	0.31	0.26	0.36	0.3	0.25	0.34	0.28	0.24
9	0.38	0.3	0.24	0.37	0.29	0.24	0.35	0.28	0.23	0.33	0.27	0.22	0.31	0.26	0.22
10	0.35	0.27	0.22	0.34	0.27	0.22	0.32	0.26	0.21	0.31	0.25	0.2	0.29	0.23	0.2

Gama Angle Range:-180 - 180(Deg)

Gama interval(Deg): 1

Temperature(Deg): 30

Tester: zxcg

Distance(m): 7.070

Test System: ZWL Goniophotometer System V3.0

C Angle Range:0 - 180(Deg)

C interval(Deg): 45

Humidity(%):60

Date: 2023-10-30

Remark:

Measured Para U: 216.4V I: 177.0mA P: 20.11W PF: 0.525 Test LM: 1803.87lm		
Lamp Name: WATER PROOF FIXTURE	Lamp Type:	Weight(kg):
Lamp ID: SY6120-H	Lamp Spec:	Shape Size:
Manufactory: LIPER	Sur(m^2):	Protect Angle(Deg):

Wall Exitance CoEfficients

Ceiling(%)		0			0			0			0			0	
Wall(%)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Floor (%)		0			0			0			0			0	
0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
1	0.37	0.21	0.07	0.36	0.21	0.07	0.34	0.2	0.06	0.32	0.18	0.06	0.3	0.18	0.06
2	0.33	0.18	0.05	0.32	0.17	0.05	0.3	0.17	0.05	0.28	0.16	0.05	0.26	0.15	0.05
3	0.29	0.16	0.05	0.28	0.15	0.05	0.27	0.14	0.04	0.25	0.14	0.04	0.23	0.13	0.04
4	0.26	0.14	0.04	0.26	0.13	0.04	0.24	0.13	0.04	0.23	0.12	0.04	0.21	0.12	0.04
5	0.24	0.12	0.04	0.23	0.12	0.03	0.22	0.11	0.03	0.21	0.11	0.03	0.19	0.1	0.03
6	0.22	0.11	0.03	0.21	0.11	0.03	0.2	0.1	0.03	0.19	0.1	0.03	0.18	0.09	0.03
7	0.2	0.1	0.03	0.2	0.1	0.03	0.19	0.09	0.03	0.18	0.09	0.03	0.17	0.09	0.03
8	0.19	0.09	0.03	0.18	0.09	0.03	0.17	0.09	0.02	0.16	0.08	0.02	0.15	0.08	0.02
9	0.18	0.09	0.02	0.17	0.08	0.02	0.16	0.08	0.02	0.15	0.08	0.02	0.14	0.07	0.02
10	0.17	0.08	0.02	0.16	0.08	0.02	0.15	0.07	0.02	0.14	0.07	0.02	0.14	0.07	0.02

Ceiling Cavity Exitance CoEfficients

Ceiling(%)		0			0			0			0			0	
Wall(%)	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Floor (%)		0			0			0			0			0	
0	0.29	0.29	0.29	0.25	0.25	0.25	0.17	0.17	0.17	0.1	0.1	0.1	0.03	0.03	0.03
1	0.29	0.26	0.23	0.25	0.22	0.2	0.17	0.15	0.14	0.1	0.09	0.08	0.03	0.03	0.03
2	0.28	0.23	0.2	0.24	0.2	0.17	0.16	0.14	0.12	0.09	0.08	0.07	0.03	0.03	0.02
3	0.27	0.22	0.17	0.23	0.19	0.15	0.16	0.13	0.11	0.09	0.08	0.06	0.03	0.02	0.02
4	0.26	0.2	0.16	0.23	0.18	0.14	0.16	0.12	0.1	0.09	0.07	0.06	0.03	0.02	0.02
5	0.26	0.19	0.15	0.22	0.17	0.13	0.15	0.12	0.09	0.09	0.07	0.05	0.03	0.02	0.02
6	0.25	0.19	0.14	0.21	0.16	0.12	0.15	0.11	0.09	0.09	0.07	0.05	0.03	0.02	0.02
7	0.24	0.18	0.14	0.21	0.16	0.12	0.14	0.11	0.08	0.08	0.06	0.05	0.03	0.02	0.02
8	0.24	0.17	0.13	0.2	0.15	0.12	0.14	0.11	0.08	0.08	0.06	0.05	0.03	0.02	0.02
9	0.23	0.17	0.13	0.2	0.15	0.11	0.14	0.1	0.08	0.08	0.06	0.05	0.03	0.02	0.02
10	0.22	0.17	0.13	0.19	0.14	0.11	0.13	0.1	0.08	0.08	0.06	0.05	0.03	0.02	0.02

Gama Angle Range:-180 - 180(Deg)

Gama interval(Deg): 1

Temperature(Deg): 30

Tester: zxcg

Distance(m): 7.070

Test System: ZWL Goniophotometer System V3.0

C Angle Range:0 - 180(Deg)

C interval(Deg): 45

Humidity(%):60

Date: 2023-10-30

Remark:

Measured Para U: 216.4V I: 177.0mA P: 20.11W PF: 0.525 Test LM: 1803.87lm		
Lamp Name: WATER PROOF FIXTURE	Lamp Type:	Weight(kg):
Lamp ID: SY6120-H	Lamp Spec:	Shape Size:
Manufactory: LIPER	Sur(m^2):	Protect Angle(Deg):