

liper

2026.04



GERMANY LIPER ELECTRICAL CO.,LTD
ZHEJIANG LIPER LIGHTING TECHNOLOGY CO., LTD

www.liperlighting.com
<https://www.facebook.com/LiperGermany>



Established in Germany in 1912...



LED



Das einzige unveränderliche Thema - Qualität

Brilliant light,
the unique eternal topic-----
quality.

liper

ESTABLISHED IN GERMANY IN 1912





Firmenprofil >>>

COMPANY PROFILE

Zhejiang Liper Beleuchtungstechnik AG(Kurze Einführung)



Im Dezember 2015 etablierten Liper Elektrogeräte GmbH in Deutschland und Zhejiang Liper Beleuchtungstechnik AG offiziell eine strategische Partnerschaft. Deutsche Führungskräfte und chinesische Vertreter unterzeichneten eine strategische Kooperationsvereinbarung in Deutschland. Die beiden Seiten beginnen mit der vielseitigen Zusammenarbeit, was signalisiert, dass Liper Beleuchtungstechnik AG zu einer neuen Etappe gegangen ist. Ein Flugzeugträger in internationaler Beleuchtungsindustrie wird bald abfahren.....

Wir werden die Vorteile der deutschen Industrietechnologie und den kontinuierlich verbesserten germanischen Geist voll integrieren, um ausgezeichnete Leistungen und nachhaltige Entwicklung zu erzielen und die ganzheitlichen Beleuchtungslösungen mit Weltrang für die weltweite kommerzielle Beleuchtung, Innenbeleuchtung und Außenbeleuchtung zu bieten. Dies ist eine Erweiterung des beidseitigen strategischen Layout. Darüber hinaus werden das neue Zusammenarbeitsmodell und die Strategie tiefgreifende Auswirkungen auf LED-Beleuchtungsindustrie haben.

Nach jahrelangen Entwicklungen hat Liper Beleuchtungstechnik AG sich zu einem globalen Beleuchtungsgeschäft entwickelt, was Forschung und Entwicklung, Produktion sowie Vertrieb integriert und mehr als 2.000 bestehende Mitarbeiter hat. Das Unternehmen hält sich an das "menschenorientierte" Entwicklungskonzept und legt großen Wert auf die Errichtung des Talentteams, technologische Talente kraftvoll einzuführen und zu trainieren. Das Unternehmen führt die deutschen fortschrittlichen Technologien und Ausrüstungen umfassend ein und errichtet F&E-Zentrum und Laborator auf nationaler Ebene. Es hat ein professionelles Team zum Management vom Betrieb, dessen Produkte auf der ganzen Welt verkauft werden. Zudem gründet es Niederlassungen und Geschäftsstellen in Europa, Mittlerem Osten, Südamerika, Südostasien, Afrika und anderen Regionen.

Durch die Zusammenarbeit zwischen Liper Beleuchtungstechnik AG und Liper Elektrogeräte GmbH in Deutschland, werden die beide Seiten ihre jeweiligen professionellen Vorteile im Produktionsmanagement und technischen Bereich voll integrieren, die Zusammenarbeit in F & E und Produkt durchzuführen, während in Markt, Kanal und Vertrieb zusammenzuarbeiten. Die "Liper Beleuchtung" entwickelt sich zum globalen Beleuchtungsgeschäft und zur führenden Beleuchtungsmarke Chinas. Bei der Gestaltung der internationalen Marke engagiert das Liper-Personal sich immer für die Gesinnung eines grünen, harmonischen, energiesparenden und kohlenstoffarmen neuen Lebens, um eine bessere Beleuchtungsumgebung für die ganze Welt zu schaffen und das Leben jeden Tag zu beleuchten!

Liper lässt die Welt energiesparender!

Zhejiang Liper Lighting Technology Co., Ltd

By officially reaching a strategic partnership on December 2015 upon signing of a strategic cooperation agreement between top leaders of the German company and representatives of its Chinese counterpart in Germany, Germany Liper Electric Co., Ltd and Zhejiang Liper Lighting Technology Co., Ltd have conducted all-round cooperation, marking a new stage of Liper's development. An aircraft carrier in the international lighting industry is about to set sail.....

We will fully integrate the German superior industrial technologies and improve German spirits to achieve excellence in performance and sustainable development, so as to provide world first-class integrated lighting solutions for the global commercial lighting, indoor lighting and outdoor lighting. It is not only an extension of the strategic layout of the two sides, but the new cooperation pattern and strategy will bring a far-reaching impact on the LED lighting industry.

After years of development, Liper now has grown into a global lighting enterprise engaged in product R & D, production and sales. The company currently employs more than 2000 people and attaches great importance to the establishment of high-quality talent team with great efforts made to introduce and cultivate talents of science and technology, under the "people-oriented" development philosophy. By widely introducing a full set of advanced technologies and equipment from Germany, setting up a state-level R & D center and laboratory, and putting business under management of the professional team, the company has exported its products to markets throughout the world with subsidiaries and offices in Europe, the Middle East, South America, Southeast Asia, Africa and other regions.

Based on business cooperation, Liper and Germany Liper will fully integrate their professional advantages in production management and technology for cooperation in R & D and products as well as in the fields of marketing, channels and sales, so that Liper will grow into a global lighting company as the leader brand in Chinese lighting industry. In shaping an international brand, Liper workers are still committed to promoting new views of green, harmonious, energy saving and low-carbon life, to create a better light environment for the world and light the life every day!

Liper make the world more energy saving!





Gruppenfoto von Vorstandvorsitzender Herr Wang Renle und Staatspräsident
Board Chairman Mr.Wang Renle take group photo with Chinese former and current president



Links vierte in der zweiten Reihe
The second row of the fourth on the left



Rechts erst in der zweiten Reihe
The second row of the first on the right

Contents



LED FLOOD LIGHT 001-012



LED STREET LIGHT 013-023



LED SOLAR LIGHT 024-034



LED UFO LIGHT 035-040



LED LAMP 041-044



LED STEP LIGHT 045-050



LED WALL LIGHT 051-054



LED DOWN LIGHT 055-100



LED TRACK LIGHT 101-112



LED LOUVER FITTING 113-114



LED TUBE 115-120



LED STRIP LIGHT 121-122



LED MAGNETIC TRACK LIGHT 123-127



Brilliant light,
the unique eternal topic-----
quality.



LED FLOOD LIGHT

AC:100/220-240V CRI≥80 H:30000h

IP66

Lens Replaceable



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPFL-30BW01	● 30W	3000-3300LM	N	158X142X32mm
LPFL-50BW01	● 50W	5000-5500LM	N	165X188X32mm
LPFL-100BW01	● 100W	10000-11000LM	N	250X222X33mm



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPFL-150BW01	● 150W	15000-16500LM	N	300X273X33mm
LPFL-200BW01	● 200W	20000-20500LM	N	338X324X33mm
LPFL-300BW01	● 300W	30000-30500LM	N	388X408X38mm

Material

High Quality Aviation
Aluminum

Color Temperature

Warm White



Cool White



Natural White



CCT Adjustable



LED FLOOD LIGHT

AC:100/220-240V CRI≥80 H:30000h

IP66



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPFL-10BW02	● 10W	1000-1100LM	N	98X109X29mm
LPFL-20BW02	● 20W	2000-2200LM	N	113X109X29mm
LPFL-30BW02	● 30W	3000-3300LM	N	158X142X31mm
LPFL-50BW02	● 50W	5000-5500LM	N	166X188X31mm



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPFL-100BW02	● 100W	10000-11000LM	N	251X222X31mm
LPFL-150BW02	● 150W	15000-16500LM	N	300X273X31mm
LPFL-200BW02	● 200W	20000-22000LM	N	338X324X31mm
LPFL-300BW02	● 300W	30000-33000LM	N	389X408X37mm

Material

High Quality Aviation
Aluminum

Color Temperature

Warm White



Cool White



Natural White



CCT Adjustable



LED FLOOD LIGHT

AC:100/220-240V CRI≥80 H:30000h



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPFL-20BT01	20W	2000-2080LM	N	114x90x29mm
LPFL-30BT01	30W	3000-3080LM	N	136X118X29mm
LPFL-50BT01	50W	5000-5080LM	N	175X152X29mm
LPFL-100BT01	100W	10000-10500LM	N	236x202x32mm
LPFL-200BT01	200W	20000-20500LM	N	301X251X35mm
LPFL-300BT01	300W	30000-30500LM	N	330x302x35mm

Material

High Quality Aviation
Aluminum

LED FLOOD LIGHT

AC:100/220-240V CRI≥80 H:30000h

IP66



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPFL-20BT02	20W	2000-2080LM	N	114x90x29mm
LPFL-30BT02	30W	3000-3080LM	N	136X118X29mm
LPFL-50BT02	50W	5000-5080LM	N	175X152X29mm
LPFL-100BT02	100W	10000-10500LM	N	236x202x32mm



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPFL-200BT02	200W	20000-20500LM	N	301X251X35mm
LPFL-300BT02	300W	30000-30500LM	N	330x302x35mm
LPFL-400BT02	400W	40000-40500LM	N	485x385x66mm
LPFL-500BT02	500W	50000-50500LM	N	485x385x66mm

Material

High Quality Aviation
Aluminum

Color Temperature





BF SERIES
LED FLOOD LIGHT

LED FLOOD LIGHT

AC:100/220-240V CRI≥80 H:30000h



Curved Shape

Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPFL-50BF01	50W	4000-4050LM	N	140X160X46mm
LPFL- 80BF01	80W	6400-6480LM	N	220X202X51mm
LPFL-50BF01-CCT	50W	4000-4050LM	N	140X160X46mm
LPFL- 80BF01-CCT	80W	6400-6480LM	N	220X202X51mm

Material

High Quality Aviation Aluminum

Color Temperature

Warm White

Cool White

Natural White

CCT Adjustable



BS SERIES
LED FLOOD LIGHT

LED FLOOD LIGHT

AC:100/220-240V CRI≥80 H:30000h

IP66



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPFL-10BS01	10W	1000-1080LM	N	117X31X107mm
LPFL-20BS01	20W	2000-2080LM	N	117X31X107mm
LPFL-30BS01	30W	3000-3080LM	N	156X144X33mm
LPFL-50BS01	50W	5000-5080LM	N	199X36X160mm
LPFL-70BS01	70W	7000-7080LM	N	255X50X240mm
LPFL-100BS01	100W	10000-10500LM	N	331X50X280mm
LPFL-150BS01	150W	15000-15500LM	N	331X62X280mm
LPFL-200BS01	200W	20000-20500LM	N	331X88X280mm

Sensor Parameters

TIME: 10 seconds to 7 minutes
LUX: 20-20000 lux
SENS: 2-8 meters



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPFL-10BS01-G	10W	1000-1080LM	N	167X55X107mm
LPFL-20BS01-G	20W	2000-2080LM	N	167X55X107mm
LPFL-30BS01-G	30W	3000-3080LM	N	202X56X156mm
LPFL-50BS01-G	50W	5000-5080LM	N	225X60X198mm

Material


Stretched Aluminum

Color Temperature

Warm White

Cool White

Natural White

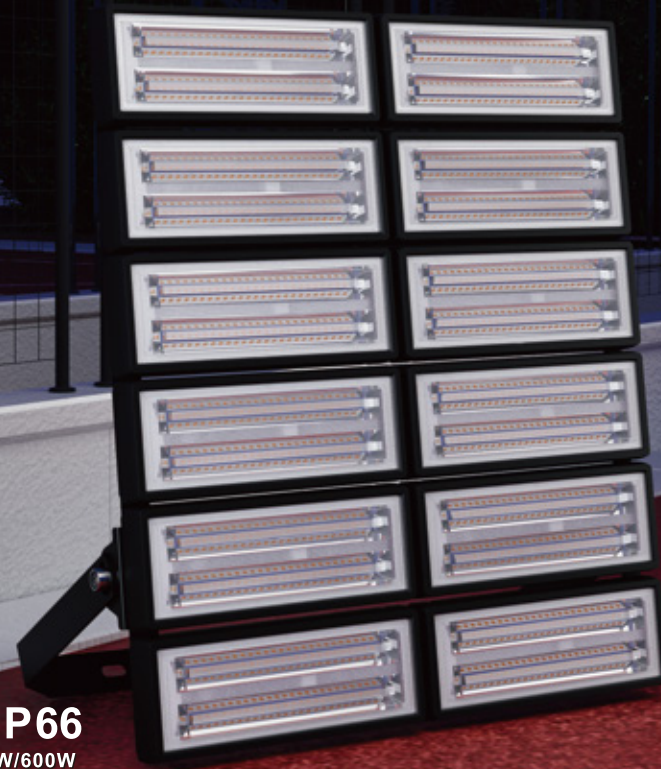


LED FLOOD LIGHT

Long Lifetime High Lumen Efficiency High CRI
Good Heat Dissipation No Radiation Energy Saving

IP 66

50W/100W/150W/200W/250W/400W/500W/600W

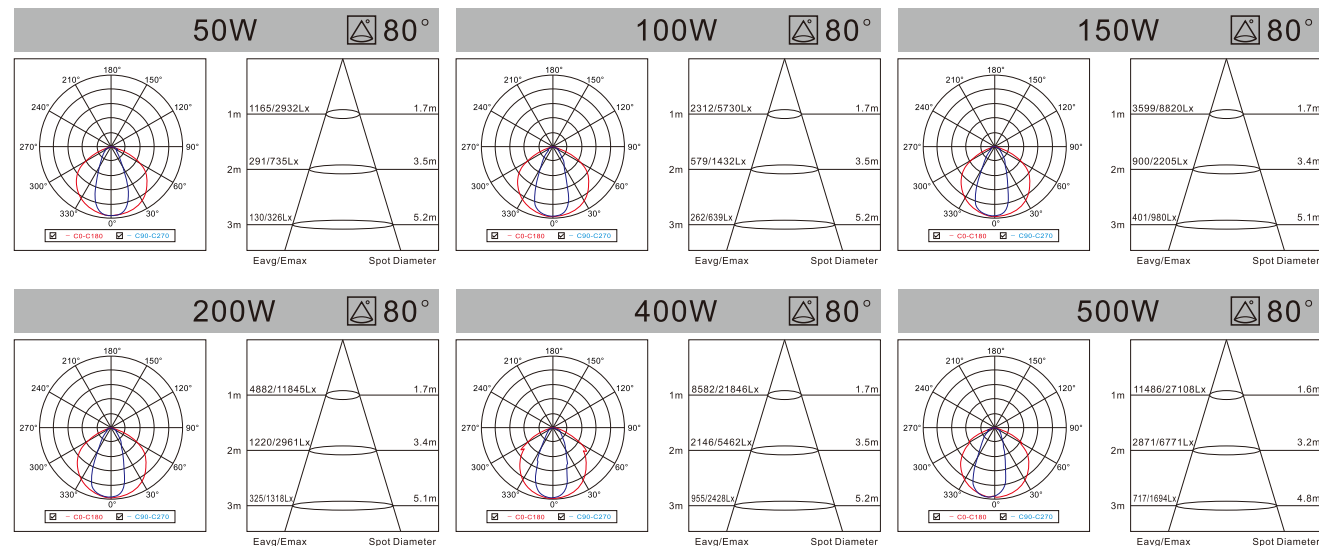

Material

High Quality Aviation
Aluminum

Color Temperature

Warm White



MS SERIES LED FLOOD LIGHT

LED FLOOD LIGHT

AC:100/220-240V CRI $\geq$ 80 H:30000h



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPFL-50MS01	🔦 50W	4980-5120LM	N	295X70X138mm
LPFL-100MS01	🔦 100W	10560-11380LM	N	295X70X268mm
LPFL-150MS01	🔦 150W	14800-15500LM	N	298X73X378mm
LPFL-200MS01	🔦 200W	20800-21500LM	N	298X73X490mm



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPFL-300MS01	 300W	28900-29600LM	N	573X73X378mm
LPFL-400MS01	 400W	39500-40200LM	N	573X73X490mm
LPFL-500MS01	 500W	48600-49700LM	N	573X73X600mm
LPFL-600MS01	 600W	58800-59500LM	N	573X73X710mm



Liper Light 007/008



MT SERIES

LED FLOOD LIGHT

MT SERIES

LED FLOOD LIGHT

LED FLOOD LIGHT

AC:100/220-240V CRI≥80 H:30000h



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPFL-250MT01	250W	25000-27500LM	N	255x523x67mm
LPFL-500MT01	500W	50000-55000LM	N	430x523x67mm
LPFL-750MT01	750W	75000-82500LM	N	580x523x67mm
LPFL-1000MT01	1000W	100000-110000LM	N	756x523x67mm

Material

High Quality Aviation
Aluminum

Color Temperature

Warm White

Cool White

Natural White



A/B SERIES
LED GRASS LIGHT

LED FLOOD LIGHT

AC:100/220-240V CRI≥80 H:30000h

IP66



Material
UV-Resistant Plastic

Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPGSL-07A01-Y	7W	525-595LM	N	70X90mm



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPGSL-10B01	10W	900LM	N	103x89x70mm
LPGSL-20B01	20W	1800LM	N	152x129x84mm
LPGSL-30B01	30W	2700LM	N	192x162x95mm



Material
High Quality Aviation Aluminum

Color Temperature

Warm White

Cool White

Natural White

CCT Adjustable



HW SERIES
LED WORK LIGHT

LED FLOOD LIGHT

AC:100/220-240V CRI≥80 H:30000h

IP54

Working Modes:

- 1. Super Bright
- 2. Bright
- 3. Weak Bright
- 4. Red and Blue Strobe Lights
With USB DC5V Charger



Modell Model	Leistung Power	Batteriekapazität Battery Capacity	Verdunklung DIM	Produktgröße Product Size
LPWK-100HW01	100W	3.7V/4400mAh	N	340x282x70mm
LPWK-200HW01	200W	3.7V/8800mAh	N	400x312x70mm

Material
UV-Resistant Plastic

Color Temperature

Warm White

Cool White

Natural White



LED STREET LIGHT

AC:100/220-240V CRI≥80 H:30000h



IP66



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Rohrdurchmesser einbauen Installation Pipe Diameter
LPSTL-50G01	● 50W	5130-6270LM	N	395x108x47mm	Ø 50/60mm
LPSTL-100G01	● 100W	10260-12540LM	N	458x120x49mm	Ø 50/60mm
LPSTL-150G01	● 150W	15390-18810LM	N	563x159x62mm	Ø 50/60mm
LPSTL-200G01	● 200W	20520-25080LM	N	650x173x62mm	Ø 50/60mm

Material

High Quality Aviation
Aluminum

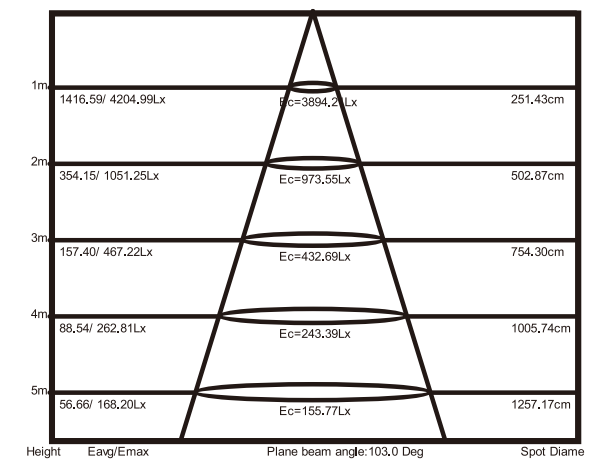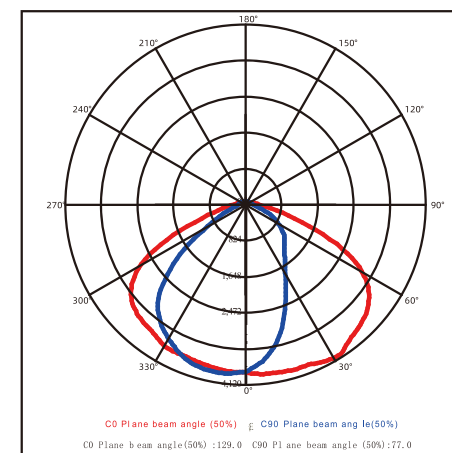

Color Temperature

Warm White



Cool White



Natural White





LED STREET LIGHT

AC:100/220-240V CRI≥80 H:30000h

IP66





Angle Adjustable

Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Rohrdurchmesser einbauen Installation Pipe Diameter
LPSTL-50GS01	● 50W	5130-6270LM	N	470x107x92mm	Ø 50/60mm
LPSTL-100GS01	● 100W	10260-12540LM	N	535x120x92mm	Ø 50/60mm
LPSTL-150GS01	● 150W	15390-18810LM	N	604x159x92mm	Ø 50/60mm
LPSTL-200GS01	● 200W	20520-25080LM	N	693x173x92mm	Ø 50/60mm

Material

High Quality Aviation
Aluminum

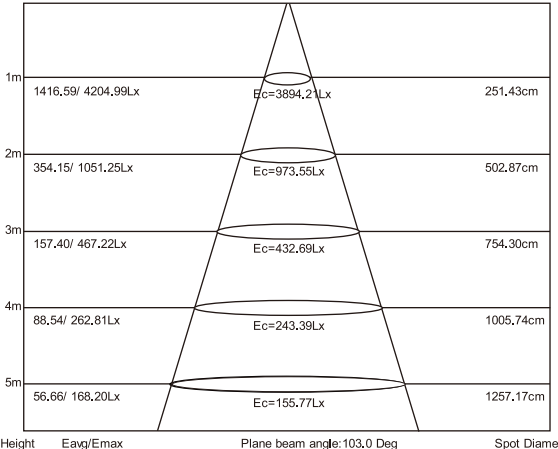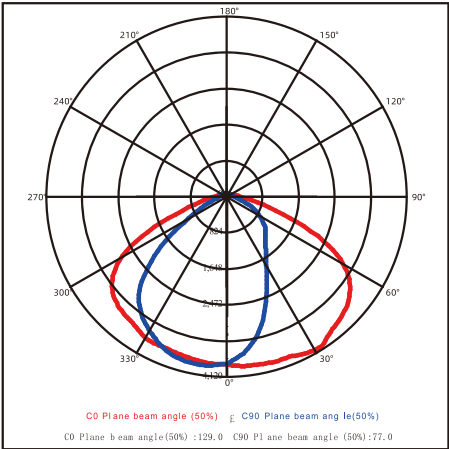

Color Temperature






LED STREET LIGHT

AC:100/220-240V CRI≥80 H:30000h

IP66



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Rohrdurchmesser einbauen Installation Pipe Diameter
LPSTL-20C01	20W	1900-2200LM	N	282X55X144mm	Ø 50mm
LPSTL-30C01	30W	2850-3300LM	N	282X55X144mm	Ø 50mm
LPSTL-50C01	50W	4750-5500LM	N	383X67X190mm	Ø 50mm
LPSTL-100C01	100W	9500-11000LM	N	490X85X225mm	Ø 50/60mm
LPSTL-100C01-G	100W	9500-11000LM	N	490X158X225mm	Ø 50/60mm
LPSTL-150C01	150W	14250-16500LM	N	600X95X272mm	Ø 50/60mm
LPSTL-200C01	200W	19000-22000LM	N	643X120X293mm	Ø 50/60mm

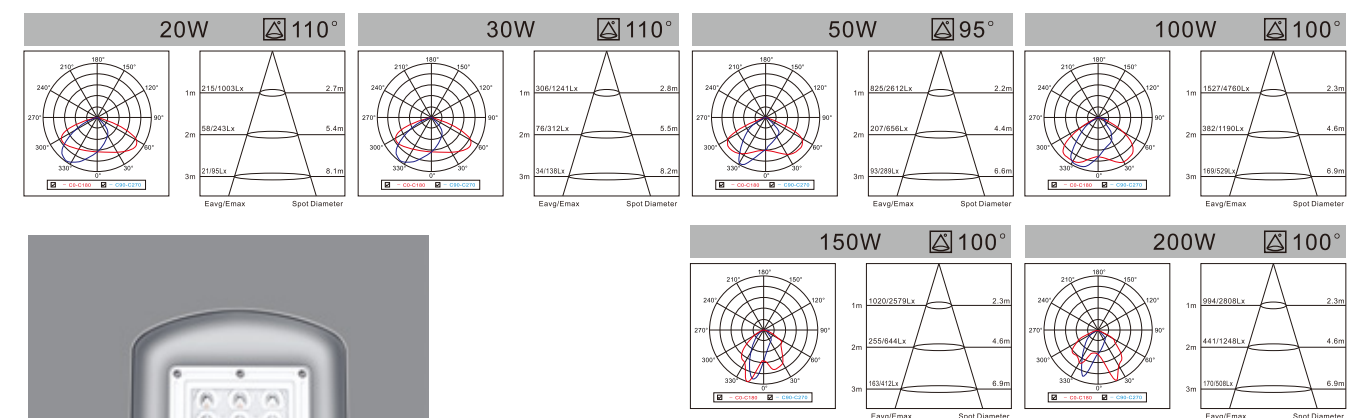

Material

High Quality Aviation
Aluminum

Color Temperature

Warm White





Cool White




Natural White




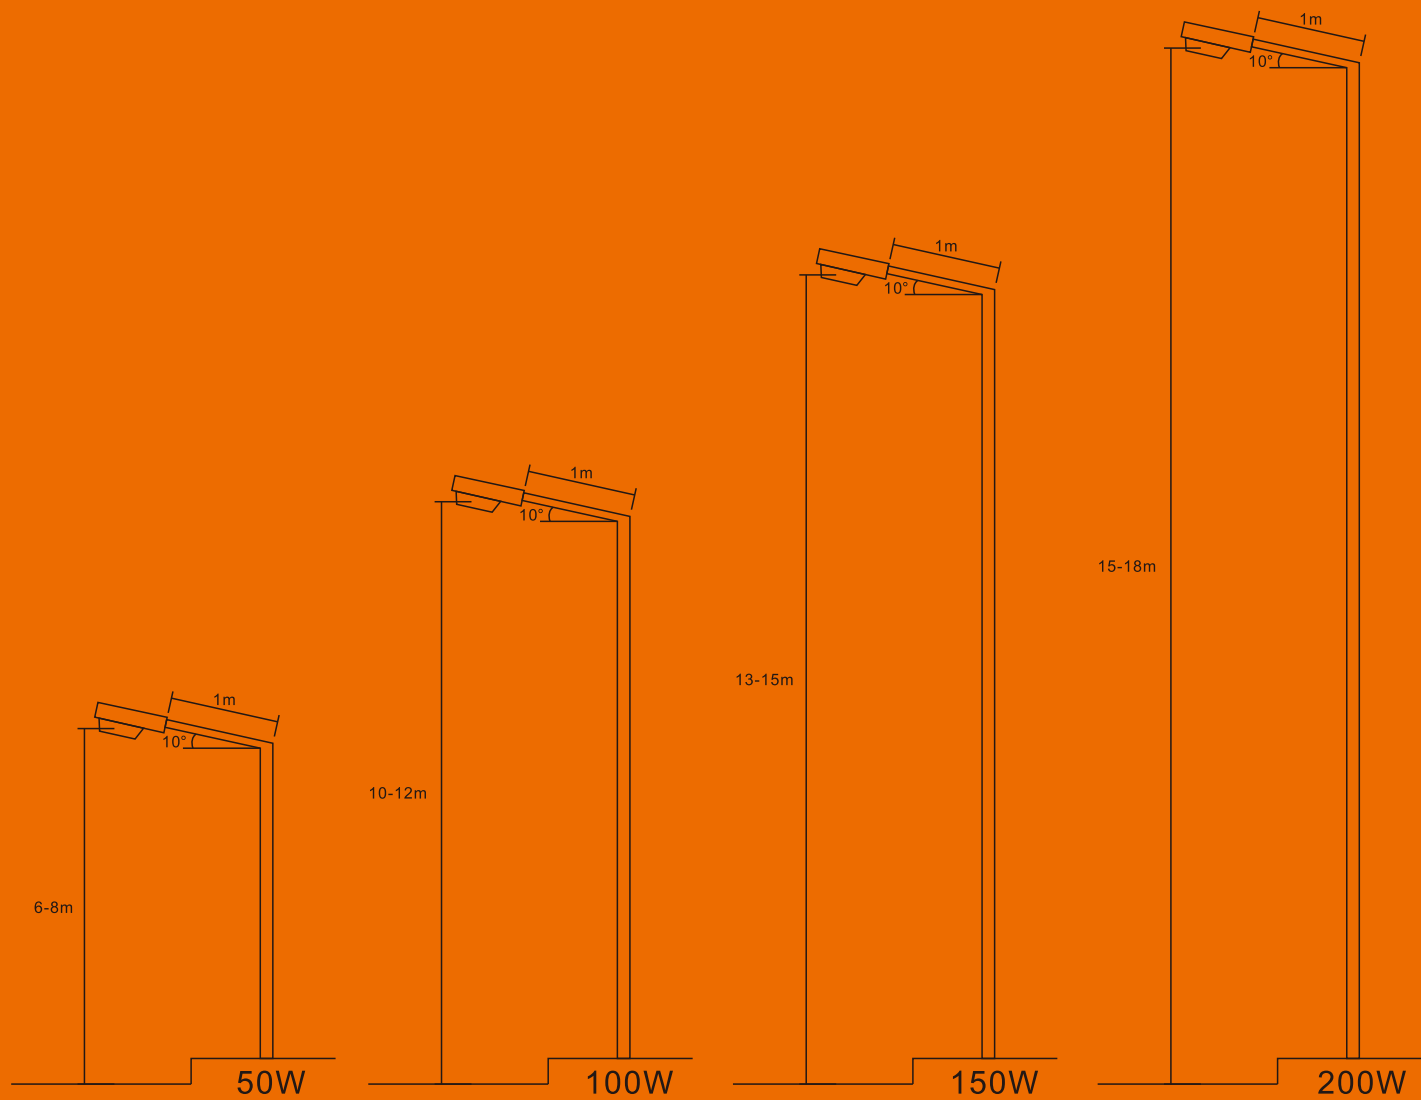


A



B



C



D

RECOMMENDED SPACING OF STREET LIGHTS					ROAD REFERENCE DATASHEET				
	A	B	C	D	Lm(cd/m²)	Uo	U1	TI[%]	EIR
50W	18-21m	18-21m	30-36m	32-38m	≥0. 75	≥0. 40	≥0. 60	≤15	≥0. 30
100W	30-36m	30-36m	52-68m	57-63m					
150W	42-48m	42-48m	57-63m	57-63m					
200W	45-51m	45-51m	57-63m	57-63m					

LED STREET LIGHT

AC:100/220-240V CRI≥80 H: 50000h

Phillips Driver

Lumen Efficiency Option

120LM/W

160LM/W

180LM/W



IP66



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Rohrdurchmesser einbauen Installation Pipe Diameter
LPSTL-100H01	● 100W	12000-13200LM	N	552x245x122mm	Ø 60mm
LPSTL-150H01	● 150W	18000-19800LM	N	673x259x125mm	Ø 60mm
LPSTL-200H01	● 200W	24000-26400LM	N	706x306x116mm	Ø 60mm

Material

High Quality Aviation
Aluminum

Color Temperature



LED SOLAR LIGHT

CRI≥80 H:20000h



Material

High Quality Aviation Aluminum

Modell Model	Leistung Power	Batteriekapazität Battery Capacity	Produktgröße Product Size	Batterietyp Battery Type
LPSTL-400D01-Y	400W	80Ah	1050×390×88	LFP Battery



Modell Model	Leistung Power	Batteriekapazität Battery Capacity	Produktgröße Product Size	Batterietyp Battery Type
LPSTL-200E01-Y	200W	6000mAh	360x181x48	LFP Battery

Material

UV -Resistant Plastic

Color Temperature



LED SOLAR LIGHT

CRI≥80 H:20000h



Radar Sensor (Default Mode)

- 1.100% brightness when people are within the induction range
- 2.10% brightness after a 15-second delay when people leave



Modell Model	Leistung Power	Batteriekapazität Battery Capacity	Produktgröße Product Size	Batterietyp Battery Type
LPSTL-100ES01-SS	100W	5000mAh	310x207x47mm	LFP battery
LPSTL-200ES01-SS	200W	6000mAh	385x207x47mm	LFP battery
LPSTL-300ES01-SS	300W	10000mAh	460x220x47mm	LFP battery
LPSTL-400ES01-SS	400W	15000mAh	580x236x47mm	LFP battery

Material

UV-Resistant Plastic

Color Temperature






LED SOLAR LIGHT

CRI≥80 H:20000h

IP65



Modell Model	Leistung Power	Opladtid Charging Time	Batteriekapazität Battery Capacity	Produktgröße Product Size	Rohrdurchmesser einbauen Installation Pipe Diameter	Batterietyp Battery Type
LPSTL-100D01	100W	4-6 Hours	15Ah	510X50X320mm	Ø 55-60mm	LFP Battery
LPSTL-200D01	200W	4-6 Hours	26Ah	510X50X320mm	Ø 55-60mm	LFP Battery

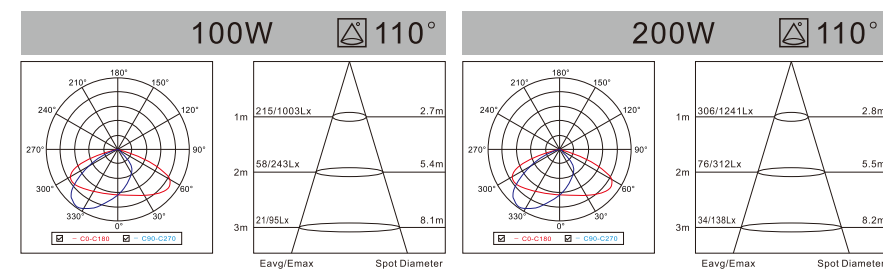

Material

High Quality Aviation Aluminum

Color Temperature

Warm White



Cool White



Natural White





100W/200W
SOLAR STREET LIGHT IP65

LED SOLAR LIGHT

CRI≥80 H:20000h



Modell Model	Leistung Power	Batteriekapazität Battery Capacity	Produktgröße Product Size	Rohrdurchmesser einbauen Installation Pipe Diameter	Batterietyp Battery Type
LPSTL-100BS01-SS	100W	20Ah	670X350X590mm	Ø 50/60mm	LFP Battery
LPSTL-200BS01-SS	200W	30Ah	770X350X670mm	Ø 50/60mm	LFP Battery

Material

High Quality Aviation
Aluminum

Color Temperature

Warm White



Cool White



Natural White






LED SOLAR LIGHT

CRI≥80 H:20000h

IP65



Modell Model	Leistung Power	Batteriekapazität Battery Capacity	Produktgröße Product Size	Rohrdurchmesser einbauen Installation Pipe Diameter	Batterietyp Battery Type
LPSTL-30BS01-SS	30W	6.5Ah	200X120X430mm	Ø 55mm	LFP Battery
LPSTL-60BS01-SS	60W	12Ah	450X125X450mm	Ø 55mm	LFP Battery
LPSTL-90BS01-SS	90W	16.5Ah	510X125X510mm	Ø 55mm	LFP Battery

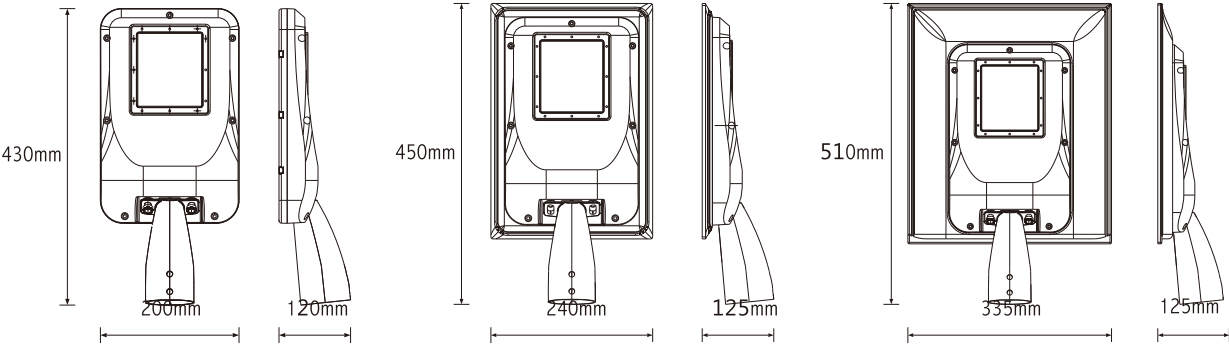

Material

High Quality Aviation
Aluminum

Color Temperature

Warm White



Cool White




Natural White





HF SERIES

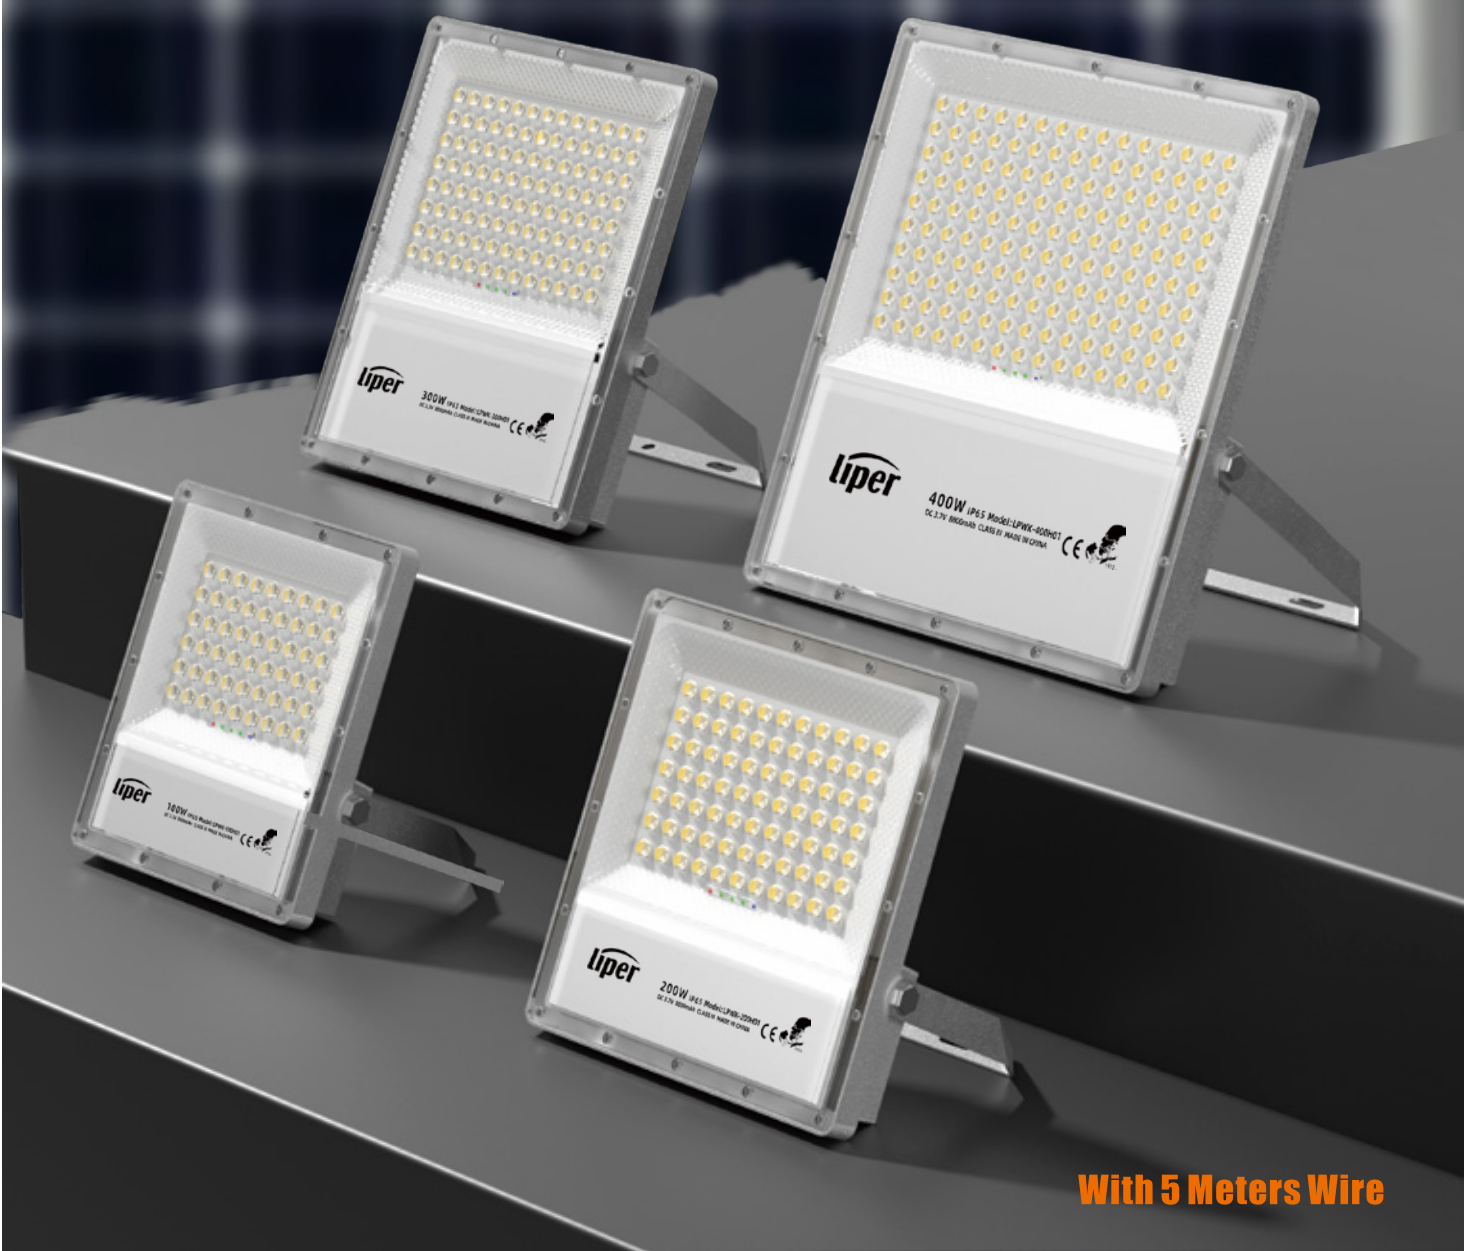

Modell Model	Leistung Power	Batteriekapazität Battery Capacity	Batterietyp Battery Type
LPFL-100HF01-SS	● 100W	6Ah	LFP Battery
LPFL-200HF01-SS	● 200W	12Ah	LFP Battery
LPFL-300HF01-SS	● 300W	18Ah	LFP Battery
LPFL-400HF01-SS	● 400W	24Ah	LFP Battery

Material	Color Temperature		
High Quality Aviation Aluminum	Warm White	Cool White	Natural White



HW SERIES
LED SOLAR LIGHT

LED SOLAR LIGHT

CRI≥80 H:20000h



Modell Model	Leistung Power	Batteriekapazität Battery Capacity	Batterietyp Battery Type
LPFL-100HW01-SS	● 100W	6AH	LFP battery
LPFL-200HW01-SS	● 200W	12AH	LFP battery
LPFL-300HW01-SS	● 300W	18AH	LFP battery
LPFL-400HW01-SS	● 400W	24AH	LFP battery



Modell Model	Leistung Power	Batteriekapazität Battery Capacity	Batterietyp Battery Type
LPFL-100HW02-SS	● 100W	6AH	LFP battery
LPFL-200HW02-SS	● 200W	12AH	LFP battery
LPFL-300HW02-SS	● 300W	18AH	LFP battery
LPFL-400HW02-SS	● 400W	24AH	LFP battery

Material	Color Temperature		
UV-Resistant Plastic	Warm White	Cool White	Natural White



D/MT SERIES
LED SOLAR LIGHT

LED SOLAR LIGHT

CRI≥80 H:20000h



Modell Model	Leistung Power	Batteriekapazität Battery Capacity	Batterietyp Battery Type
LPWL-100D01	100W	3.2V 4.4AH	LFP battery

MT SERIES
LED SOLAR LIGHT



YS: white YSB: black

Modell Model	Leistung Power	Batteriekapazität Battery Capacity	Batterietyp Battery Type
LPDL-30MT01-YS	30W	3.2V 5.4Ah	LFP Battery
LPDL-30MT01-YSB	30W	3.2V 5.4Ah	LFP Battery

Material

UV-Resistant Plastic

Color Temperature

Warm White

Cool White

Natural White



C SERIES
LED SOLAR LIGHT

LED SOLAR LIGHT

CRI≥80 H:20000h



Modell Model	Leistung Power	Batteriekapazität Battery Capacity	Batterietyp Battery Type
LPWL-100C01	100W	3.2V 2.2Ah	LFP Battery
LPWL-200C01	200W	3.2V 4.4Ah	LFP Battery

Infrared Sensor

Mode 1

Press 5s

Indicator light flash twice

100% Brightness

10% Brightness

Mode 2

Short Press

Indicator light flash twice

100% Brightness

0% Brightness

Mode 3

Short Press

Indicator light flash twice

50% Brightness



Modell Model	Leistung Power	Batteriekapazität Battery Capacity	Batterietyp Battery Type
LPFL-100C01-G	100W	3.7V 2.2Ah	LFP Battery
LPFL-200C01-G	200W	3.7V 2.2Ah	LFP Battery

Material

UV-Resistant Plastic

Color Temperature

Warm White

Cool White

Natural White



MS SERIES
LED WORK LIGHT



1912

Mobile Charge

Multi-functional solar system

30W/40W

20h 15h 9h 6h

LED SOLAR LIGHT

CRI≥80 H:20000h

IP20



Material
UV-Resistant Plastic

01:black 02:white

Modell Model	Leistung Power	Batteriekapazität Battery Capacity	Batterietyp Battery Type
LP-MS30A01	30W	6Ah	LFP Battery
LP-MS40A01	40W	12Ah	LFP Battery
LP-MS30A02	30W	6Ah	LFP Battery
LP-MS40A02	40W	12Ah	LFP Battery


30W with 2 bulbs
40W with 4 bulbs





FRESH LIGHT FOR SUPERMARKET

Ra>90(AVERAGE OF R1-R8)
R9>0(OBJECT MORE COLORFUL)

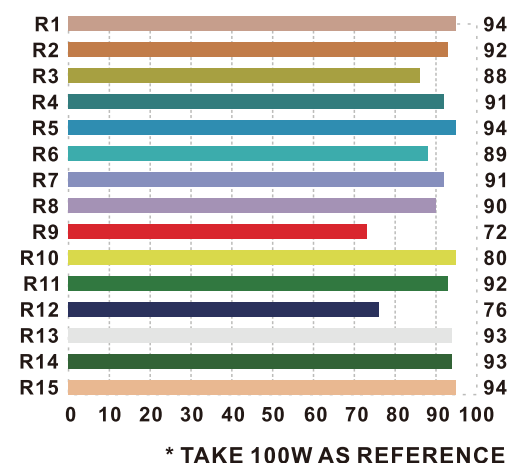



BS SERIES

LED UFO LIGHT






IP65



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPUF-150BS01	150W	16500-20250LM	N	Ø 385X120mm
LPUF-200BS01	200W	22000-27000LM	N	Ø 385X120mm
LPUF-300BS01	300W	33000-40500LM	N	Ø 385X120mm

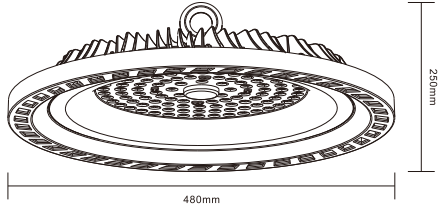

Material

High Quality Aviation Aluminum

Color Temperature

Warm White

Cool White

Natural White



E SERIES

LED UFO LIGHT

LED UFO LIGHT

AC:100/220-240V CRI≥80 H:30000h



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPUF-100E01	100W	10500-11550LM	N	Ø 263X63mm
LPUF-150E01	150W	14900-16390LM	N	Ø 315X69mm



Material

High Quality Aviation Aluminum

Color Temperature

Warm White

Cool White

Natural White



 F SERIES
LED UFO LIGHT

LED UFO LIGHT

AC:100/220-240V CRI≥80 H:30000h



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPUF-200F01	200W	20000-22000LM	N	300x108mm
LPUF-300F01	300W	30000-33000LM	N	350x118mm
LPUF-200F01-SENSOR	200W	20000-22000LM	N	300x108mm

Power Adjustable
80% 90% 100%

Material
High Quality Aviation
Aluminum

Color Temperature

Warm White

Cool White

Natural White

CCT Adjustable





AS SERIES
LED LAMP

LED LAMP



AC:100/220-240V CRI≥80 H:30000h



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lampensockel Base
LPUF-20AS-02	20W	1750-1850LM	N	Ø 130X70mm	E27/B22
LPUF-40AS-02	40W	3750-3850LM	N	Ø 190X103mm	E27/B22
LPUF-60AS-02	60W	5750-5850LM	N	Ø 255X130mm	E27/B22



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lampensockel Base
LPUF-20AS-01	20W	1750-1850LM	N	Ø 130X70mm	E27/B22
LPUF-40AS-01	40W	3750-3850LM	N	Ø 190X103mm	E27/B22
LPUF-60AS-01	60W	5750-5850LM	N	Ø 255X130mm	E27/B22

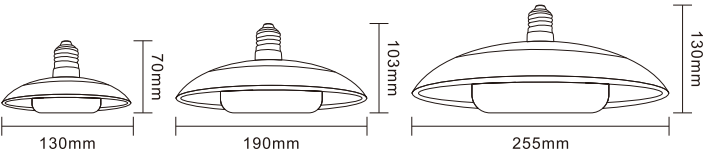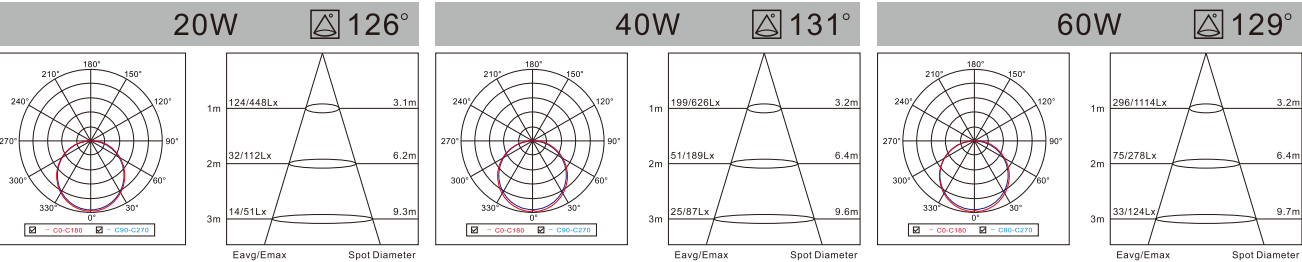

Material
High Quality Aviation Aluminum

Color Temperature
Warm White
Cool White
Natural White



D/ES SERIES
LED LAMP

LED LAMP

AC:100/220-240V CRI≥80 H:30000h



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lampensockel Base
LPQP5DLED-01	5W	430-470LM	N	Ø 60X106mm	E27/B22
LPQP7DLED-01	7W	600-660LM	N	Ø 60X106mm	E27/B22
LPQP9DLED-01	9W	770-860LM	N	Ø 60X108mm	E27/B22
LPQP12DLED-01	12W	1005-1105LM	N	Ø 60X110mm	E27/B22
LPQP15DLED-01	15W	1235-1365LM	N	Ø 70X124mm	E27/B22
LPQP18DLED-01	18W	1520-1680LM	N	Ø 80X145mm	E27/B22
LPQP20DLED-01	20W	1710-1890LM	N	Ø 80X145mm	E27/B22



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lampensockel Base
LPQP20ES-01	20W	1900-2100LM	N	Ø 80X150mm	E27/B22
LPQP30ES-01	30W	2850-3150LM	N	Ø 100X185mm	E27/B22
LPQP40ES-01	40W	3610-3990LM	N	Ø 120X210mm	E27/B22
LPQP50ES-01	50W	4275-4725LM	N	Ø 138X240mm	E27/B22

Material
UV-Resistant Plastic

Color Temperature
Warm White
Cool White
Natural White



A SERIES
LED STEP LIGHT


LED STEP LIGHT AC:100/220-240V CRI≥80 H:30000h

IP65



01:black 02:white 03:grey

Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPWL-07A01-Y	7W	Ambient Lighting	N	Ø 228x81x30mm
LPWL-07A01YCCT	7W	Ambient Lighting	N	Ø 228x81x30mm

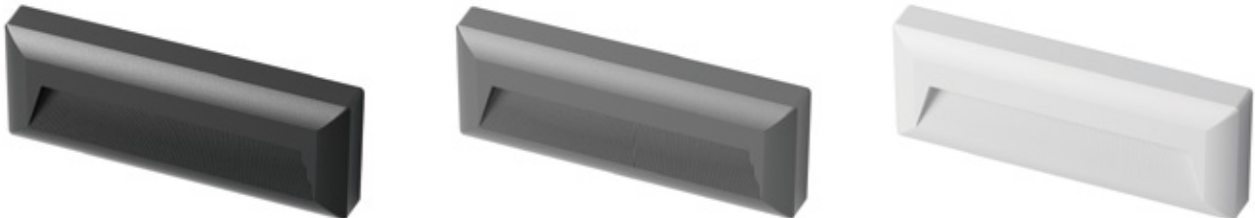


01:black 02:white 03:grey

Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPWL-05A01-Y	5W	Ambient Lighting	N	228x85x30mm
LPWL-05A01YCCT	5W	Ambient Lighting	N	228x85x30mm

Material

UV-Resistant Plastic

Color Temperature



AS SERIES
LED STEP LIGHT

LED STEP LIGHT AC:100/220-240V CRI≥80 H:30000h

IP65



01:black 02:white 03:grey


Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPWL-05AS01-Y	5W	Ambient Lighting	N	Ø 246X97X45mm
LPWL-05AS01-YCCT	5W	Ambient Lighting	N	Ø 246X97X45mm
LPWL-07AS01-Y	7W	Ambient Lighting	N	Ø 246X97X45mm
LPWL-07AS01-YCCT	7W	Ambient Lighting	N	Ø 246X97X45mm



Material

UV-Resistant Plastic

Color Temperature





LED STEP LIGHT


AC:100/220-240V CRI≥80 H:30000h

IP65



01:black 02:white 03:grey

Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPWL-05B01-Y	5W	Ambient Lighting	N	236x85x32mm
LPWL-05B01-YCCT	5W	Ambient Lighting	N	236x85x32mm

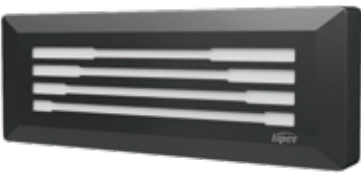

01:black 02:white 03:grey

Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPWL-08B01-Y	8W	Ambient Lighting	N	236x85x32mm
LPWL-08B01-YCCT	8W	Ambient Lighting	N	236x85x32mm

Material

High Quality Aviation
Aluminum

Color Temperature



CCT Adjustable



BS SERIES

LED STEP LIGHT

BS SERIES

LED STEP LIGHT

LED STEP LIGHT

AC:100/220-240V CRI≥80 H:30000h

IP65



01:black 02:white 03:grey


Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPWL-05BS01-Y	5W	Ambient Lighting	N	246x97x32mm
LPWL-05BS01-YCCT	5W	Ambient Lighting	N	246x97x32mm



01:black 02:white 03:grey

Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPWL-08BS01-Y	8W	Ambient Lighting	N	246x97x32mm
LPWL-08BS01-YCCT	8W	Ambient Lighting	N	246x97x32mm

Material	Color Temperature			
High Quality Aviation Aluminum	Warm White	Cool White	Natural White	CCT Adjustable
				

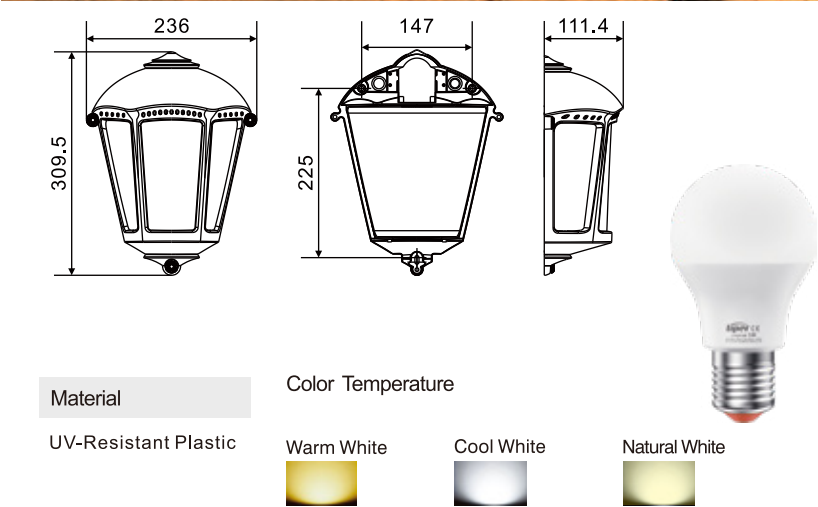

Material	Color Temperature		
UV-Resistant Plastic	Warm White	Cool White	Natural White
			



D SERIES

LED WALL LIGHT


LED WALL LIGHT

AC:100/220-240V CRI≥80 H:30000h

IP65



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPWL-04D01-Y	4W	Ambient Lighting	N	142X95X51mm
LPWL-06D01-Y	6W	Ambient Lighting	N	182X103X51mm
LPWL-08D01-Y	8W	Ambient Lighting	N	218X111X59mm

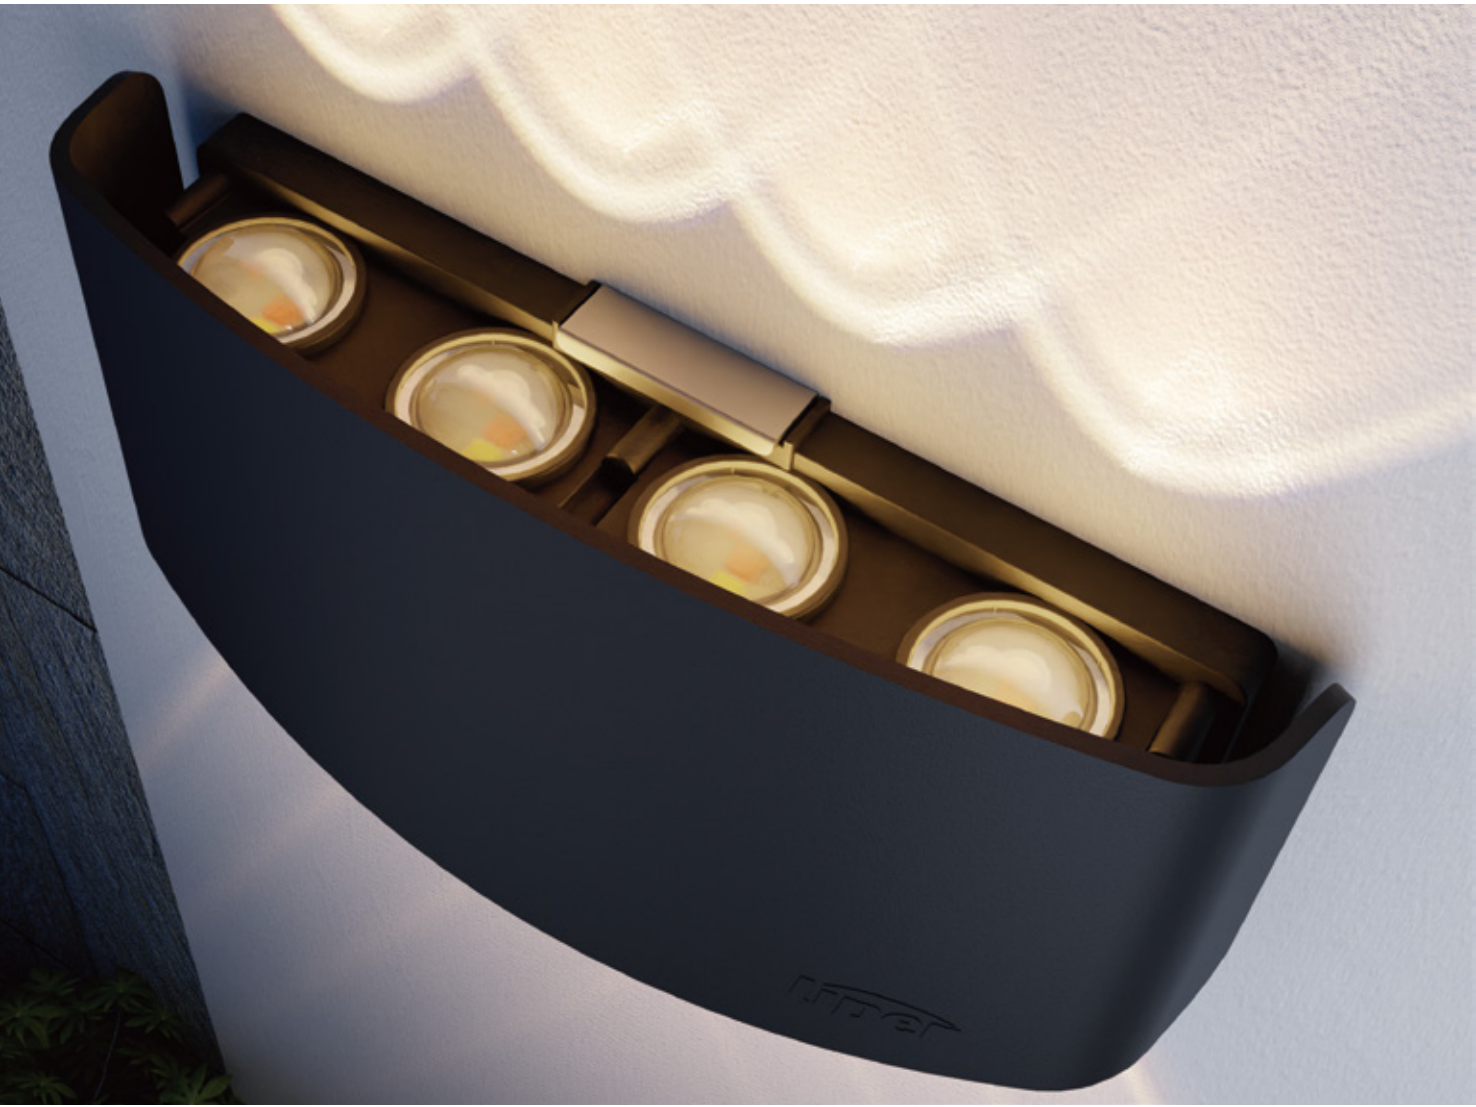


Material	Color Temperature			
UV-Resistant Plastic	Warm White	Cool White	Natural White	CCT Adjustable
				

C SERIES
LED WALL LIGHT

LED WALL LIGHT

AC:100/220-240V CRI≥80 H:30000h

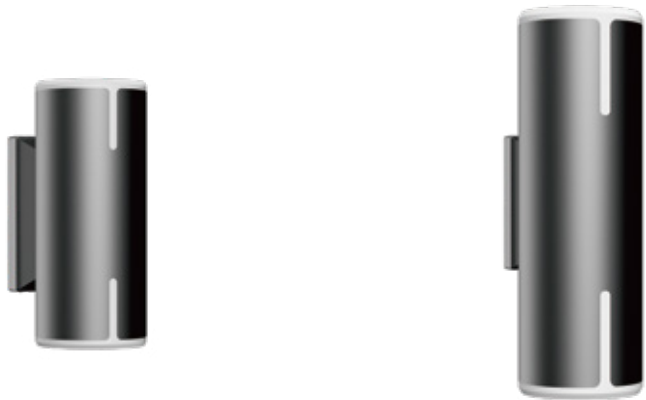

Modell Model	Leistung Power	Lumen Lumen	DIM DIM	Produktgröße Product Size
LPWL-08C01-Y	8W	Ambient Lighting	N	Ø 70X165mm
LPWL-12C01-Y	12W	Ambient Lighting	N	Ø 90X275mm



Material

High Quality Aviation Aluminum

Color Temperature

Warm White

Cool White

Natural White

CCT Adjustable

110mm

70mm

100mm

165mm

130mm

90mm

100mm

275mm

C SERIES
LED WALL LIGHT

LED WALL LIGHT

AC:100/220-240V CRI≥80 H:30000h



Modell Model	Leistung Power	Lumen Lumen	DIM DIM	Produktgröße Product Size
LPWL-10C01-Y	10W	Ambient Lighting	N	Ø80X230mm

Material

High Quality Aviation Aluminum

Color Temperature

Warm White

Cool White

Natural White


CCT Adjustable

120mm

80mm

100mm

230mm



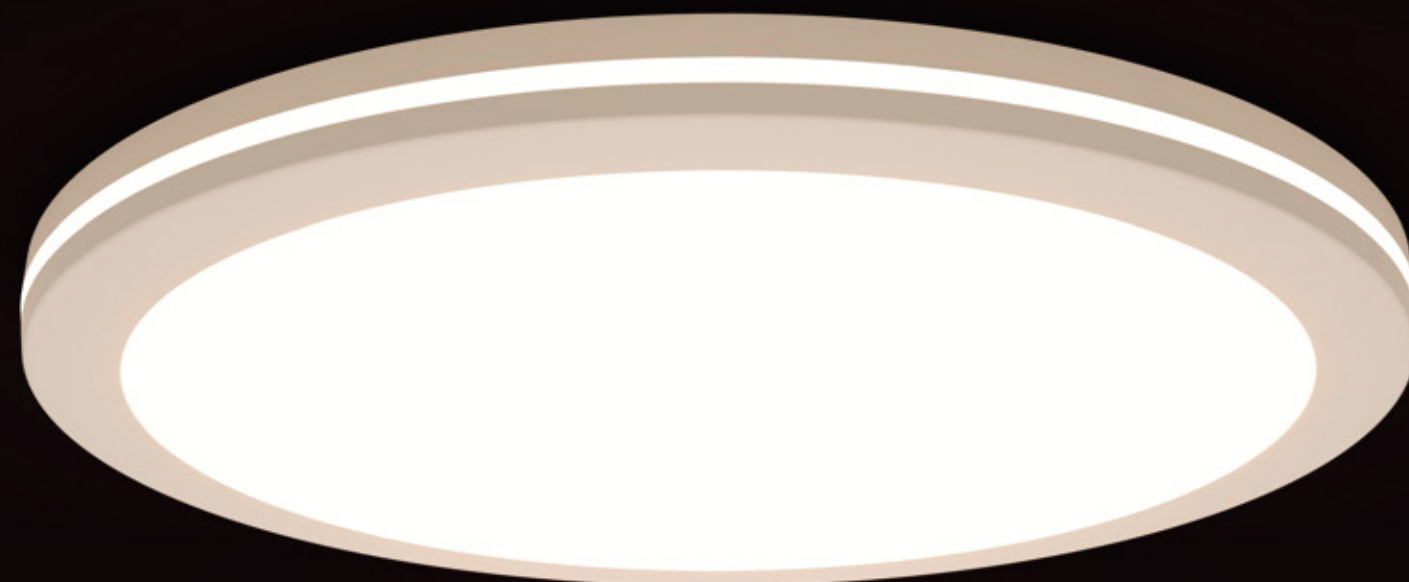




MA SERIES
LED DOWNLIGHT



IP65 Anti-insect

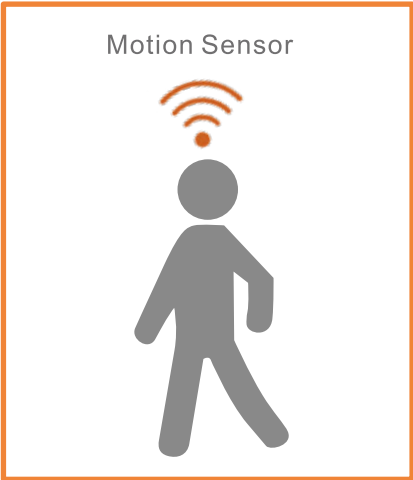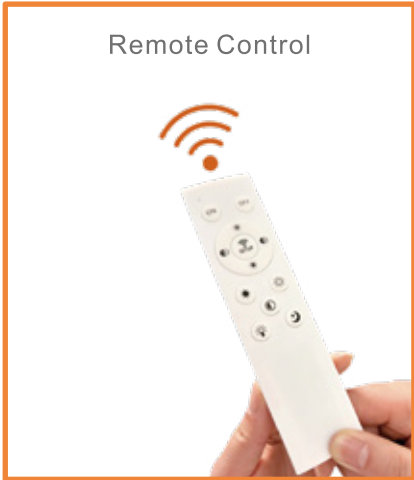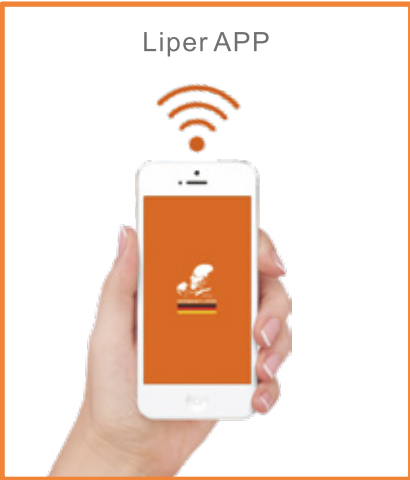

IP65 DOWN LIGHT

AC:100/220-240V CRI≥80 H:30000h



Screw
Installation



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LP-DL20MA01-Y	20W	1600-1700LM	N	Ø 182X48mm
LP-DL30MA01-Y	30W	2400-2500LM	N	Ø 235X52mm
LP-DL40MA01-Y	40W	3200-3300LM	N	Ø 292X55mm
LP-DL50MA01-Y	50W	5000-5100LM	N	Ø 380X55mm
LP-DL60MA01-Y	60W	5130-5670LM	N	Ø 495X53mm
LP-DL20MA01-YG(SENSOR)	20W	1600-1700LM	N	Ø 182X48mm
LP-DL30MA01-YG(SENSOR)	30W	2400-2500LM	N	Ø 235X52mm



Non Screw
Installation

Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LP-DL30MAS01-Y	30W	2400-2500LM	N	Ø 231x53mm
LP-DL40MAS01-Y	40W	3200-3300LM	N	Ø 289x58mm
LP-DL50MAS01-Y	50W	5000-5100LM	N	Ø 383x64mm

Material

UV-Resistant Plastic

Color Temperature

Warm White



Cool White




Natural White



CCT Adjustable





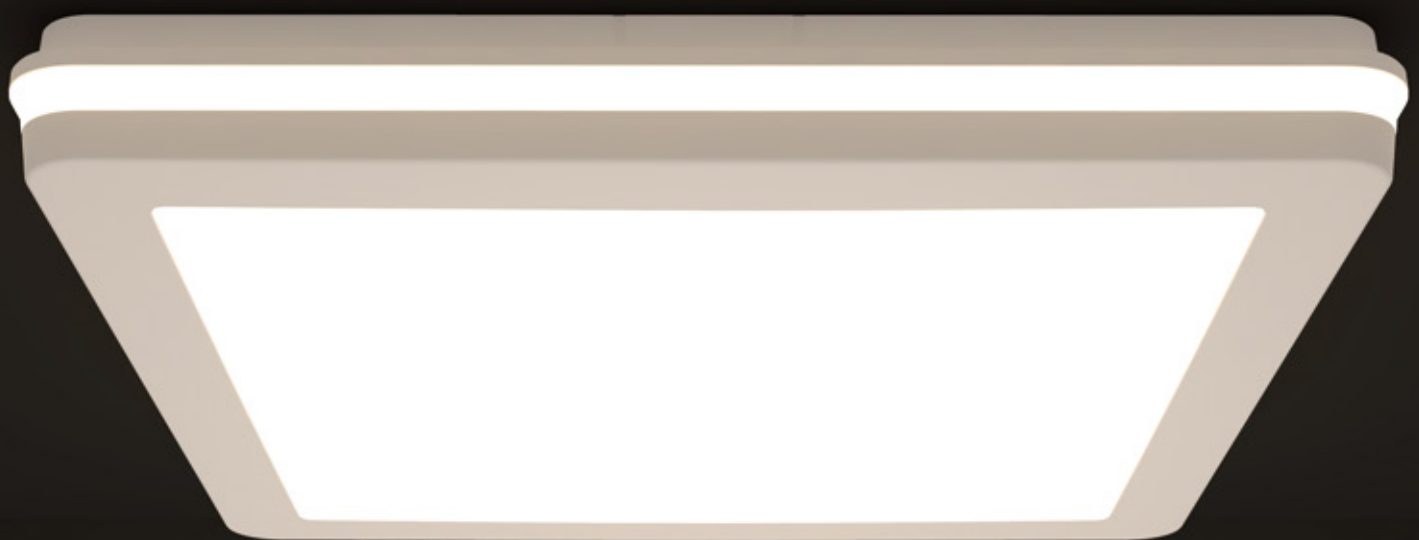

IP65 DOWN LIGHT AC:100/220-240V CRI≥80 H:30000h



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LP-DL30MA01-F	30W	2400-2500LM	N	215X57X215mm
LP-DL40MA01-F	40W	3200-3300LM	N	265X55X265mm
LP-DL30MA01-FG(SENSOR)	30W	2400-2500LM	N	215X48X215mm
LP-DL40MA01-FG(SENSOR)	40W	3200-3300LM	N	265X55X265mm

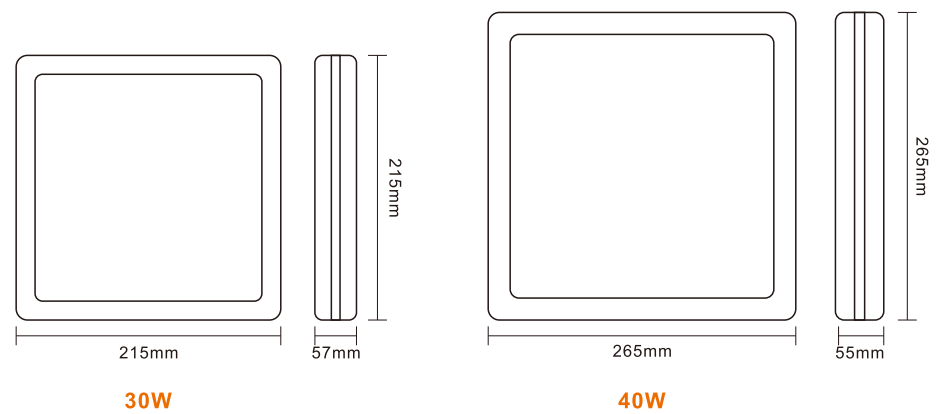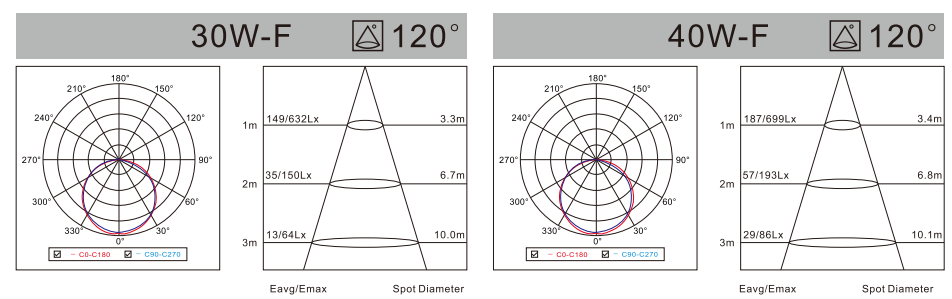


Material	Color Temperature			
UV-Resistant Plastic	Warm White	Cool White	Natural White	CCT Adjustable



IP65 Anti-insect



20W / 30W IP65
Diamond Downlight

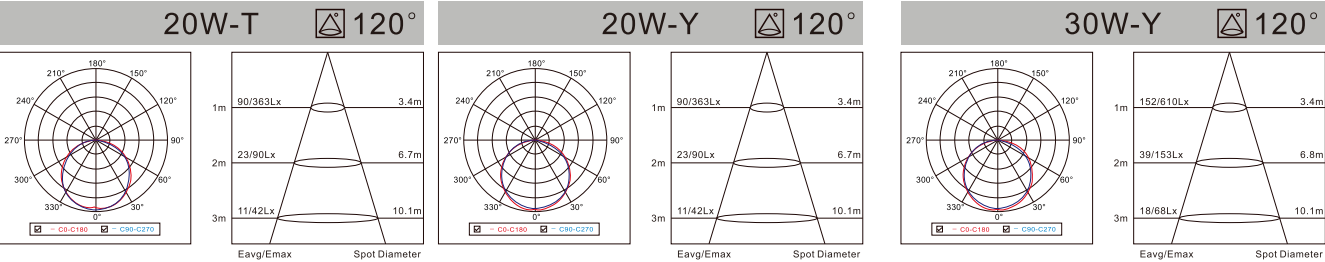

IP65 DOWN LIGHT

AC:100/220-240V CRI≥80 H:30000h




T/Y: white TH/YH: black

Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LP-DL20MT01-T	20W	1800-1900LM	N	255X125X72mm
LP-DL20MT01-Y	20W	1800-1900LM	N	Ø206X72mm
LP-DL30MT01-Y	30W	2700-2800LM	N	Ø256X76mm
LP-DL20MT01-TH	20W	1800-1900LM	N	255X125X72mm
LP-DL20MT01-YH	20W	1800-1900LM	N	Ø206X72mm
LP-DL30MT01-YH	30W	2700-2800LM	N	Ø256X76mm



T/Y: white TH/YH: black

Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LP-DL20MT02-T	20W	1800-1900LM	N	255X125X72mm
LP-DL20MT02-Y	20W	1800-1900LM	N	Ø206X72mm
LP-DL30MT02-Y	30W	2700-2800LM	N	Ø256X76mm
LP-DL20MT02-TH	20W	1800-1900LM	N	255X125X72mm
LP-DL20MT02-YH	20W	1800-1900LM	N	Ø206X72mm
LP-DL30MT02-YH	30W	2700-2800LM	N	Ø256X76mm

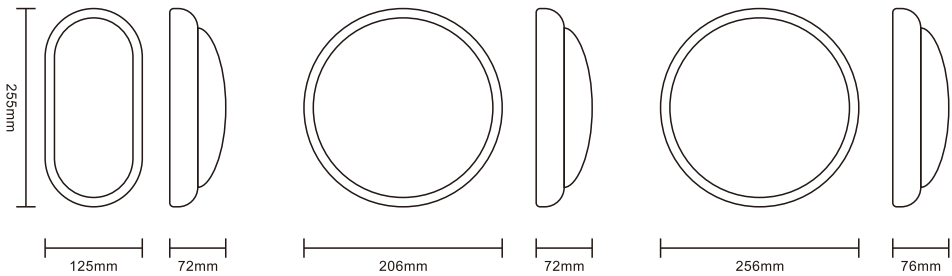

Material

UV-Resistant Plastic

Color Temperature





WITH SENSOR

Advised installation height : 3-5m
Max detection distance : 10m
It will turn off after people leave induction zone for 90s


IP65 DOWN LIGHT

AC:100/220-240V CRI≥80 H:30000h



F: white FH: black

Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LP-DL30MT02-F	● 30W	2755-3045LM	N	205X60X205mm
LP-DL40MT02-F	● 40W	3610-3990LM	N	260X60X260mm
LP-DL30MT02-FH	● 30W	2755-3045LM	N	205X60X205mm
LP-DL40MT02-FH	● 40W	3610-3990LM	N	260X60X260mm

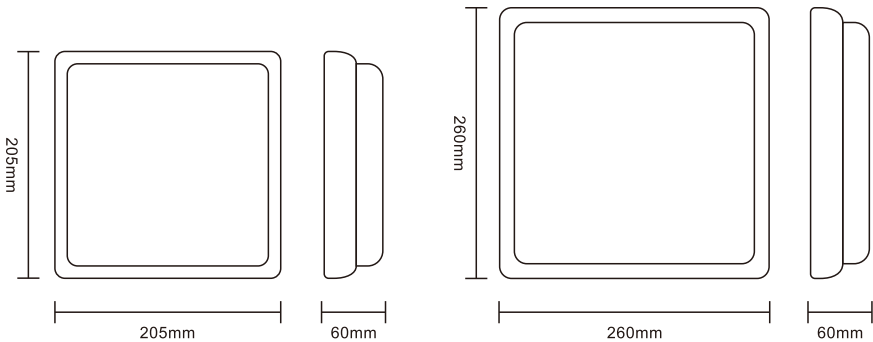

Material

UV-Resistant Plastic

Color Temperature

Warm White



Cool White



Natural White





MF SERIES
LED DOWN LIGHT



IP65 DOWN LIGHT

AC:100/220-240V CRI≥80 H:30000h



T : white TB : black

Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LP-DL20MF01-T	20W	1710-1890LM	N	224X56X138
LP-DL30MF01-Y	30W	2570-2840LM	N	255X55X255
LP-DL20MF01-TB	20W	1710-1890LM	N	224X56X138
LP-DL30MF01-YB	30W	2570-2840LM	N	255X55X255

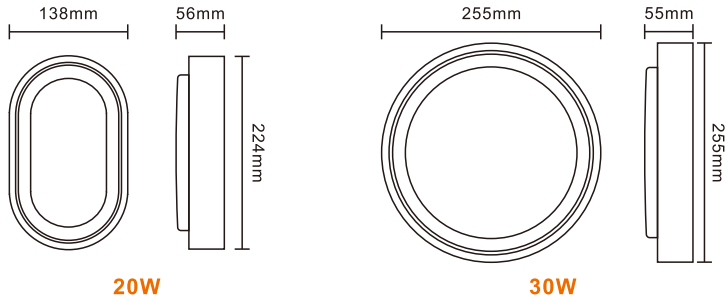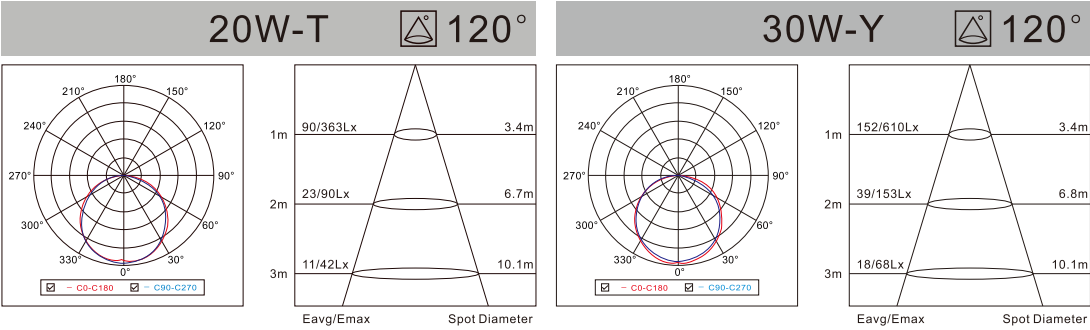

Material

High Quality Aviation
Aluminum

Color Temperature

Warm White



Cool White



Natural White





 **MS SERIES**
LED DOWN LIGHT



 GERMANY LIPER

IP65 DOWN LIGHT AC:100/220-240V CRI≥80 H:30000h

IP65



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPDL-25MS01-Y	● 25W	2125-2250LM	N	Ø 215X65mm
LPDL-35MS01-Y	● 35W	2975-3150LM	N	Ø 282X77mm
LPDL-45MS01-Y	● 45W	3825-4050LM	N	Ø 330X86mm
LPDL-25MS01-YCCT	● 25W	2125-2250LM	N	Ø 215X65mm
LPDL-35MS01-YCCT	● 35W	2975-3150LM	N	Ø 282X77mm
LPDL-45MS01-YCCT	● 45W	3825-4050LM	N	Ø 330X86mm



Material	Color Temperature			
UV-Resistant Plastic	Warm White	Cool White	Natural White	CCT Adjustable
				




MQ SERIES
LED DOWN LIGHT

IP65 DOWN LIGHT

AC:100/220-240V CRI≥80 H:30000h

IP65

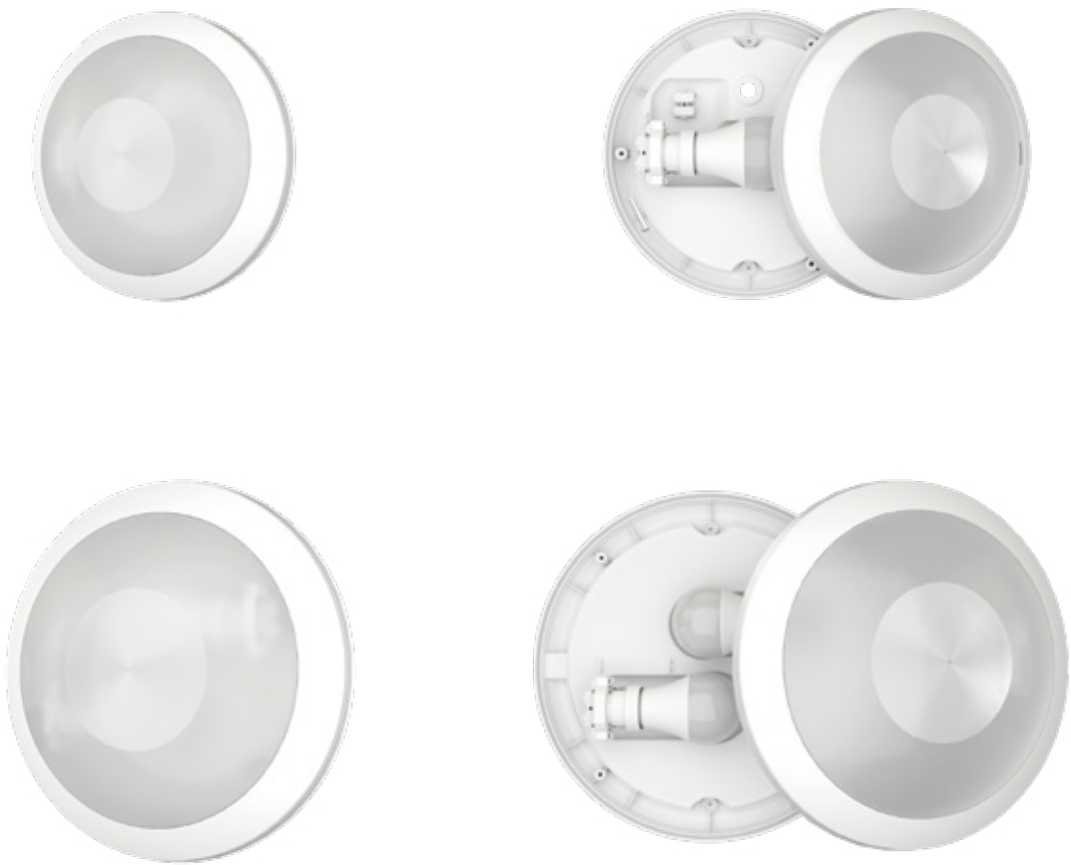

Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPDL-1MQE27	/	/	N	Ø 235X82mm
LPDL-2MQE27	/	/	N	Ø 291X83mm

Material

UV-Resistant Plastic



Modell Model	Leistung Power	Produktgröße Product Size
LPQP5DLED-01	5W	Ø 60X106mm
LPQP7DLED-01	7W	Ø 60X106mm
LPQP9DLED-01	9W	Ø 60X108mm
LPQP12DLED-01	12W	Ø 60X110mm



MF SERIES
LED WALL LIGHT

IP65



Radar Sensor
Lux: <25lux
Sensing Distance: 5-8meter
Time-Delay: 90s

IP65 DOWN LIGHT

AC:100/220-240V CRI≥80 H:30000h



Modell Model	Ambient Lighting	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LP-DL20MF01-TB-C	20W	Ambient Lighting	N	225X138X62
LP-DL20MF01-TB-CG(SENSOR)	20W	Ambient Lighting	N	225X138X62
LP-DL24MF01-YB-C	24W	Ambient Lighting	N	255X65X255
LP-DL24MF01-YB-CG(SENSOR)	24W	Ambient Lighting	N	255X65X255




Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPDL-15MF01-F-C	15W	Ambient Lighting	N	198X160X46mm

Material	Color Temperature		
High Quality Aviation Aluminum	Warm White	Cool White	Natural White

LEDDOWNLIGHT

AC:100/220-240V CRI≥80 H:30000h

IP44

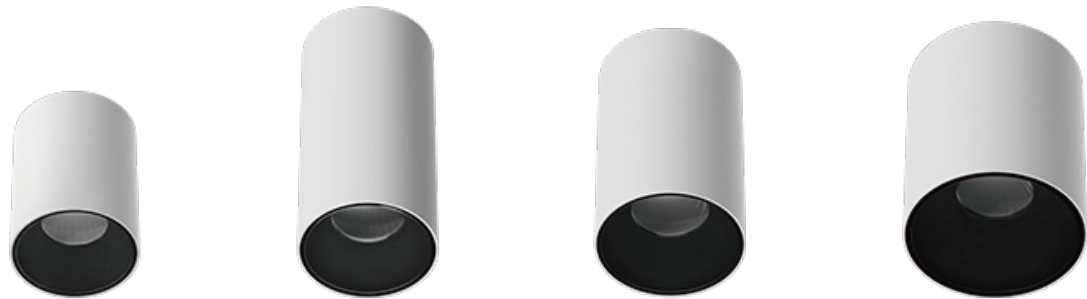

Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPCL-10A01-Y	10W	850-935LM	N	Ø 75X100mm
LPCL-15A01-Y	15W	1275-1360LM	N	Ø 75X150mm
LPCL-20A01-Y	20W	1700-1785LM	N	Ø 95X150mm
LPCL-30A01-Y	30W	2550-2635LM	N	Ø 115X135mm



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPCL-10A01-YB	10W	850-935LM	N	Ø 75X100mm
LPCL-15A01-YB	15W	1275-1360LM	N	Ø 75X150mm
LPCL-20A01-YB	20W	1700-1785LM	N	Ø 95X150mm
LPCL-30A01-YB	30W	2550-2635LM	N	Ø 115X135mm

Material	Color Temperature			
High Quality Aviation Aluminum	Warm White	Cool White	Natural White	CCT Adjustable
				

LEDDOWNLIGHT

AC:100/220-240V CRI≥80 H:30000h

IP44



Y:white YB:black

Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPCL-15A01-YR	15W	1275-1360LM	N	Ø 85X88mm
LPCL-15A01-YRCCT	15W	1275-1360LM	N	Ø 85X88mm
LPCL-15A01-YBR	15W	1275-1360LM	N	Ø 85X88mm
LPCL-15A01-YBRCCT	15W	1275-1360LM	N	Ø 85X88mm





MW SERIES
LED DOWN LIGHT



LED DOWN LIGHT

AC:100/220-240V CRI≥90 H:30000h

IP44



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPDL-30MW01-Y	30W	2700LM	N	Ø300X20mm
LPDL-40MW01-Y	40W	3600LM	N	Ø400X20mm
LPDL-50MW01-Y	50W	4500LM	N	Ø500X20mm
LPDL-60MW01-Y	60W	5400LM	N	Ø600X20mm

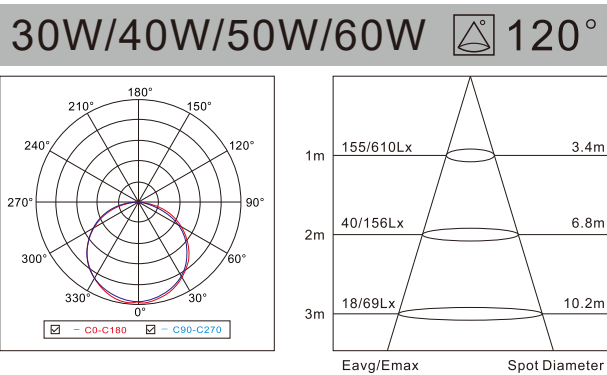

Material

UV-Resistant Plastic

Color Temperature




EMS SERIES
LED DOWN LIGHT

LED DOWN LIGHT

AC:100/220-240V CRI≥80 H:30000h

IP44

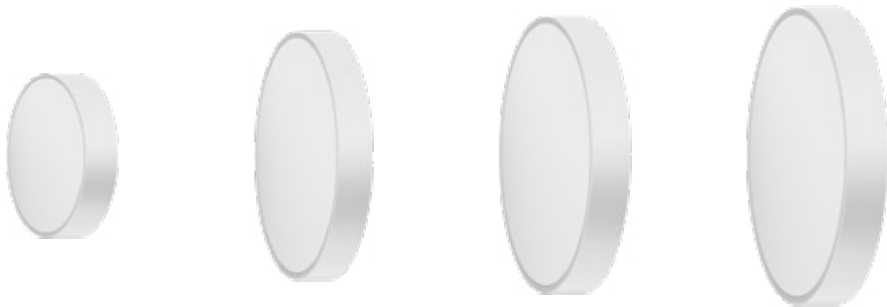

Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPDL-06EMS01-Y	6W	378-462LM	N	Ø 110x39mm
LPDL-12EMS01-Y	12W	864-1056LM	N	Ø 172x39mm
LPDL-18EMS01-Y	18W	1296-1584LM	N	Ø 222x39mm
LPDL-24EMS01-Y	24W	1836-2244LM	N	Ø 280x39mm
LPDL-40EMS01-Y	40W	3400-3600LM	N	Ø 320x49mm
LPDL-50EMS01-Y	50W	4250-4500LM	N	Ø 380x49mm



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPDL-6EMS01-F	6W	480LM	N	110x37mm
LPDL-12EMS01-F	12W	864-1056LM	N	172x37.5mm
LPDL-18EMS01-F	18W	1296-1584LM	N	203x37.5mm
LPDL-24EMS01-F	24W	1836-2244LM	N	256x37.5mm

Material






UV-Resistant Plastic

Color Temperature





IP44

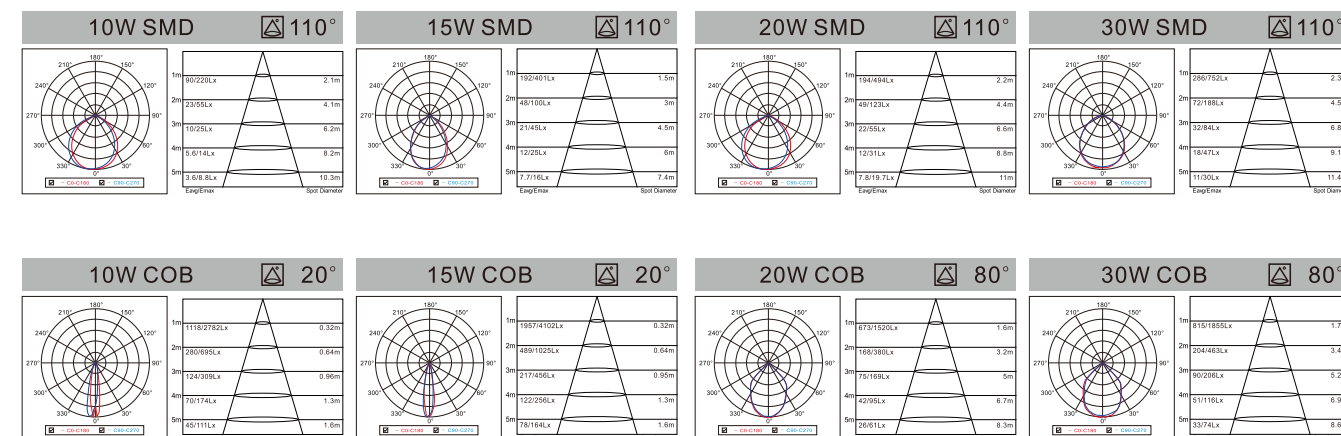

85mm

108mm

160mm

208mm

10W

15W

20W

30W

Material

High Quality Aviation Aluminum

Color Temperature

Warm White



Cool White



Natural White



CCT Adjustable





G SERIES
LED DOWN LIGHT

LED DOWN LIGHT

AC:100/220-240V CRI≥80 H:30000h

COB



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lochgröße Cutout
LP-DL10G01-Y	10W	780-840LM	N	Ø 85X53mm	Ø 75-80mm
LP-DL15G01-Y	15W	1150-1250LM	N	Ø 108X55mm	Ø 95-100mm
LP-DL20G01-Y	20W	1550-1650LM	N	Ø 165X85mm	Ø 145-150mm
LP-DL30G01-Y	30W	2300-2400LM	N	Ø 215X104mm	Ø 190-200mm



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lochgröße Cutout
LP-DL10G01-YB	10W	780-840LM	N	Ø 85X53mm	Ø 75-80mm
LP-DL15G01-YB	15W	1150-1250LM	N	Ø 108X55mm	Ø 95-100mm
LP-DL20G01-YB	20W	1550-1650LM	N	Ø 165X85mm	Ø 145-150mm
LP-DL30G01-YB	30W	2300-2400LM	N	Ø 215X104mm	Ø 190-200mm

Material

High Quality Aviation
Aluminum

Color Temperature



G SERIES
LED DOWN LIGHT

LED DOWN LIGHT

AC:100/220-240V CRI≥80 H:30000h

SMD



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lochgröße Cutout
LP-DL10G02-Y	10W	780-840LM	N	Ø 85X53mm	Ø 75-80mm
LP-DL15G02-Y	15W	1150-1250LM	N	Ø 108X55mm	Ø 95-100mm
LP-DL20G02-Y	20W	1550-1650LM	N	Ø 165X85mm	Ø 145-150mm
LP-DL30G02-Y	30W	2300-2400LM	N	Ø 215X104mm	Ø 190-200mm



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lochgröße Cutout
LP-DL10G02-YB	10W	780-840LM	N	Ø 85X53mm	Ø 75-80mm
LP-DL15G02-YB	15W	1150-1250LM	N	Ø 108X55mm	Ø 95-100mm
LP-DL20G02-YB	20W	1550-1650LM	N	Ø 165X85mm	Ø 145-150mm
LP-DL30G02-YB	30W	2300-2400LM	N	Ø 215X104mm	Ø 190-200mm

Material

High Quality Aviation
Aluminum

Color Temperature





GS/GT SERIES

LED DOWNLIGHT

LED DOWN LIGHT

AC:100/220-240V CRI≥80 H:30000h

IP44



Material

High Quality Aviation Aluminum

Y:white YB:black

Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lochgröße Cutout
LPDL-10GS01-Y	10W	850-935LM	N	Ø85X53mm	Ø75-80mm
LPDL-15GS01-Y	15W	1275-1360LM	N	Ø108X55mm	Ø95-100mm
LPDL-10GS01-YB	10W	850-935LM	N	Ø85X53mm	Ø75-80mm
LPDL-15GS01-YB	15W	1275-1360LM	N	Ø108X55mm	Ø95-100mm



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lochgröße Cutout
LPDL-7GT01-Y	7W	560-595LM	N	Ø 90X46mm	Ø75-80mm
LPDL-10GT01-Y	10W	800-850LM	N	Ø 112X52mm	Ø95-100mm
LPDL-20GT01-Y	20W	1600-1700LM	N	Ø 175X71mm	Ø150mm
LPDL-30GT01-Y	30W	2400-2550LM	N	Ø 225X85mm	Ø200mm

Material

UV-Resistant Plastic

Color Temperature



H SERIES


LED DOWN LIGHT

LED DOWN LIGHT

AC:100/220-240V CRI≥80 H:30000h

IP44

Pre-Embedded

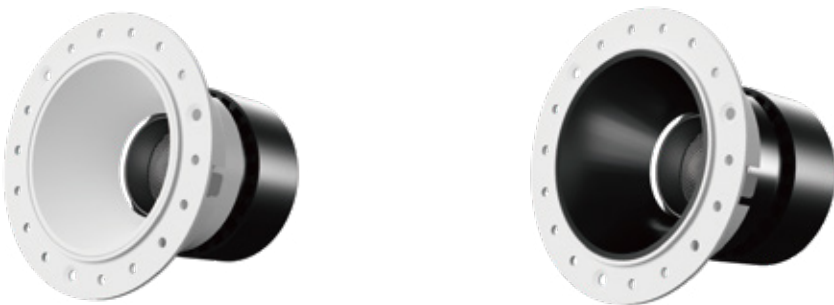

Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lochgröße Cutout
LPCL-10H02-Y	10W	850-935LM	N	Ø98X88mm	Ø75-80mm
LPCL-10H02-YB	10W	850-935LM	N	Ø98X88mm	Ø75-80mm




Y:white YB:black

Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lochgröße Cutout
LPCL-07H01-Y	7W	532-588LM	N	Ø65X62mm	Ø55mm
LPCL-07H01-YB	7W	532-588LM	N	Ø65X62mm	Ø55mm
LPCL-10H01-Y	10W	760-840LM	N	Ø88X80mm	Ø75-80mm
LPCL-10H01-YB	10W	760-840LM	N	Ø88X80mm	Ø75-80mm
LPCL-15H01-Y	15W	1140-1260LM	N	Ø115X100mm	Ø90-100mm
LPCL-15H01-YB	15W	1140-1260LM	N	Ø115X100mm	Ø90-100mm

Material

High Quality Aviation Aluminum

Color Temperature





GF SERIES
LED DOWN LIGHT

LED DOWN LIGHT

AC:100/220-240V CRI≥80 H:30000h

COB



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lochgröße Cutout
LPDL-07GF01-Y	7W	560-623LM	N	Ø 96X40mm	Ø 75-85mm
LPDL-10GF01-Y	10W	800-890LM	N	Ø 120X45mm	Ø 95-105mm
LPDL-20GF01-Y	20W	1600-1780LM	N	Ø 177X57mm	Ø 130-150mm
LPDL-30GF01-Y	30W	2400-2670LM	N	Ø 230X65mm	Ø 160-185mm



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lochgröße Cutout
LPDL-07GF01-YB	7W	560-623LM	N	Ø 96X40mm	Ø 75-85mm
LPDL-10GF01-YB	10W	800-890LM	N	Ø 120X45mm	Ø 95-105mm
LPDL-20GF01-YB	20W	1600-1780LM	N	Ø 177X57mm	Ø 130-150mm
LPDL-30GF01-YB	30W	2400-2670LM	N	Ø 230X65mm	Ø 160-185mm

Material

High-Strength
Cast Iron

Color Temperature

Warm White

Cool White

Natural White



GF SERIES
LED DOWN LIGHT

LED DOWN LIGHT

AC:100/220-240V CRI≥80 H:30000h

SMD



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lochgröße Cutout
LPDL-07GF02-Y	7W	665-735LM	N	Ø 96X40mm	Ø 75-85mm
LPDL-10GF02-Y	10W	950-1050LM	N	Ø 120X45mm	Ø 95-105mm
LPDL-20GF02-Y	20W	1900-2100LM	N	Ø 177X57mm	Ø 130-150mm
LPDL-30GF02-Y	30W	2850-3150LM	N	Ø 230X65mm	Ø 160-185mm



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lochgröße Cutout
LPDL-07GF02-YB	7W	665-735LM	N	Ø 96X40mm	Ø 75-85mm
LPDL-10GF02-YB	10W	950-1050LM	N	Ø 120X45mm	Ø 95-105mm
LPDL-20GF02-YB	20W	1900-2100LM	N	Ø 177X57mm	Ø 130-150mm
LPDL-30GF02-YB	30W	2850-3150LM	N	Ø 230X65mm	Ø 160-185mm

Material

High-Strength
Cast Iron

Color Temperature

Warm White

Cool White


Natural White

CCT Adjustable



IP44

Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lochgröße Cutout
LPDL-06K01-Y	● 6W	600LM	N	Ø 95X28mm	Ø 50-90mm
LPDL-12K01-Y	● 12W	1200LM	N	Ø 129X28mm	Ø 75-110mm
LPDL-18K01-Y	● 18W	1800LM	N	Ø 170X28mm	Ø 100-150mm
LPDL-24K01-Y	● 24W	2400LM	N	Ø 228X28mm	Ø 150-210mm

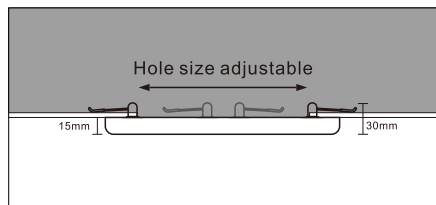

Material

UV-Resistant Plastic

Color Temperature

Warm White



Cool White



Natural White



LED DOWN LIGHT

AC:100/220-240V CRI≥80 H:30000h

IP44



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lochgröße Cutout
LP-DL10EN01-Y	● 10W	1000-1050LM	N	Ø 90x30mm	Ø 50-85mm
LP-DL18EN01-Y	● 18W	1800-1950LM	N	Ø 115x30mm	Ø 60-105mm
LP-DL24EN01-Y	● 24W	2400-2550LM	N	Ø 160x30mm	Ø 75-150mm
LP-DL36EN01-Y	● 36W	3600-3750LM	N	Ø 215x31mm	Ø 90-200mm

IP44



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lochgröße Cutout
LP-DL03EC01-Y	● 3W	210-240LM	N	Ø 85x25mm	Ø 40-75mm
LP-DL06EC01-Y	● 6W	430-510LM	N	Ø 116x25mm	Ø 55-105mm
LP-DL12EC01-Y	● 12W	880-1020LM	N	Ø 166x25mm	Ø 55-155mm
LP-DL18EC01-Y	● 18W	1450-1530LM	N	Ø 219x25mm	Ø 55-210mm

Material

High-Strength
Cast Iron

Color Temperature

Warm White



Cool White



Natural White



CCT Adjustable





LED DOWN LIGHT

AC:100/220-240V CRI≥80 H:30000h



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lochgröße Cutout
LP-DL10ENS01-Y	● 10W	900-990LM	N	Ø 100X39mm	⌀ Ø 75-90mm
LP-DL18ENS01-Y	● 18W	1620-1780LM	N	Ø 135X40mm	⌀ Ø 75-125mm
LP-DL24ENS01-Y	● 24W	2160-2376LM	N	Ø 185X42mm	⌀ Ø 75-175mm
LP-DL48ENS01-Y	● 48W	4320-4752LM	N	Ø 225X44mm	⌀ Ø 75-215mm



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
Surface frame for 24W	● 24W	/	/	Ø 189X34mm
Surface frame for 48W	● 48W	/	/	Ø 229X39mm

3CCT/4CCT Available



Material

High-Strength
Cast Iron


Color Temperature

Warm White


Cool White


Natural White


CCT Adjustable { 3CCT
4CCT

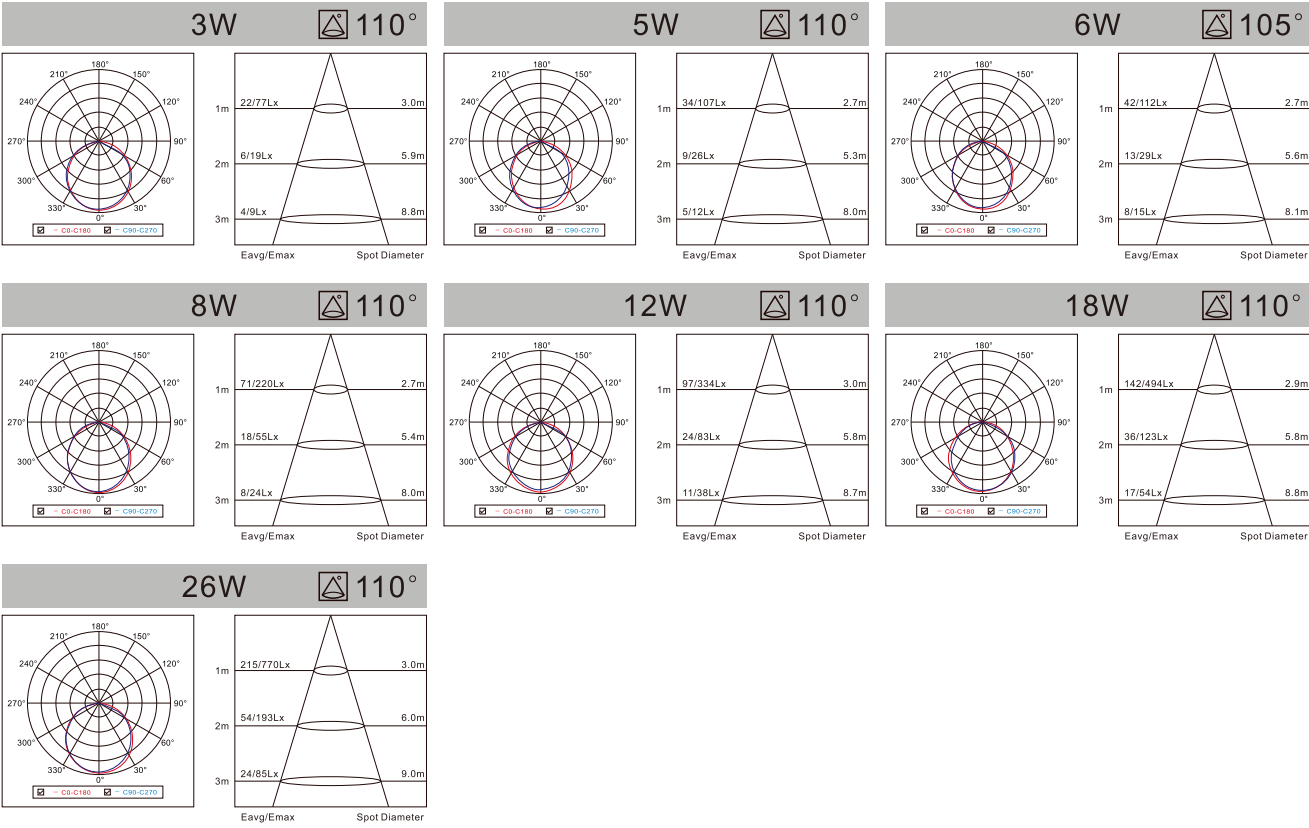LED DOWN LIGHT

AC:100/220-240V CRI≥80 H:30000h

IP44



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lochgröße Cutout
LP-DL03EW03-Y1	3W	210-240LM	N	Ø 98x28mm	Ø 70-90mm
LP-DL05EW03-Y1	5W	360-420LM	N	Ø 98x28mm	Ø 70-90mm
LP-DL06EW03-YS	6W	430-510LM	N	Ø 98x28mm	Ø 70-90mm
LP-DL06EW03-Y1	6W	430-510LM	N	Ø 120x28mm	Ø 90-110mm
LP-DL08EW03-Y1	8W	560-650LM	N	Ø 120x28mm	Ø 90-110mm
LP-DL12EW03-Y1	12W	880-1020LM	N	Ø 185x28mm	Ø 155-175mm
LP-DL18EW03-Y1	18W	1450-1530LM	N	Ø 225x28mm	Ø 195-215mm
LP-DL26EW03-Y1	26W	2110-2210LM	N	Ø 225x28mm	Ø 195-215mm



Material

High-Strength
Cast Iron

Color Temperature

Warm White



Cool White



Natural White






LED DOWN LIGHT

AC:100/220-240V CRI≥80 H:30000h

IP44



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lochgröße Cutout
LPDL-03LS01-Y	3W	225-240LM	N	Ø 83x18mm	Ø 74mm
LPDL-06LS01-Y	6W	450-480LM	N	Ø 119x18mm	Ø 108mm
LPDL-12LS01-Y	12W	900-960LM	N	Ø 167x18mm	Ø 154mm
LPDL-18LS01-Y	18W	1350-1440LM	N	Ø 220x18mm	Ø 205mm
LPDL-24LS01-Y	24W	1800-1920LM	N	Ø 297x18mm	Ø 282mm

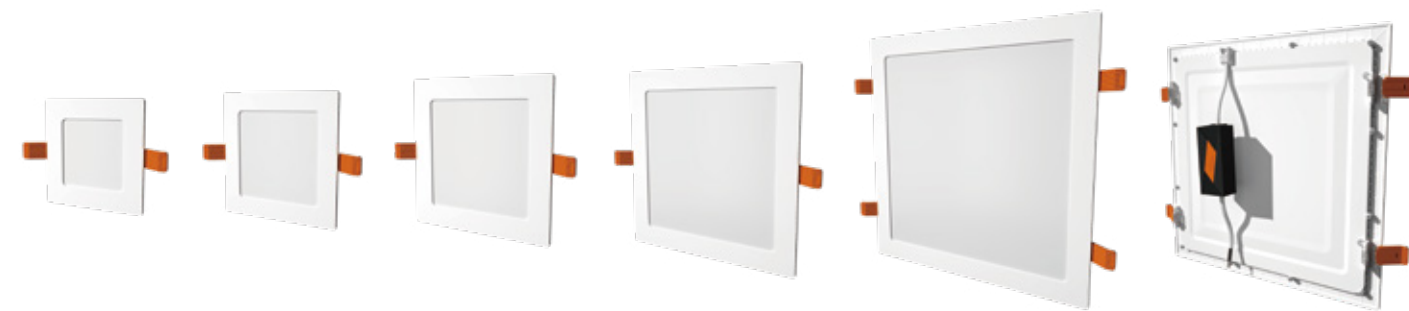

Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lochgröße Cutout
LPDL-03LS01-F	3W	225-240LM	N	84x84x18mm	Ø 74mm
LPDL-06LS01-F	6W	450-480LM	N	117x117x18mm	Ø 108mm
LPDL-12LS01-F	12W	900-960LM	N	166x166x18mm	Ø 154mm
LPDL-18LS01-F	18W	1350-1440LM	N	220x220x18mm	Ø 205mm
LPDL-24LS01-F	24W	1800-1920LM	N	290x290x18mm	□ 275x275mm

Material

Base:
High-Strength
Cast Iron

Frame:
High Quality
Aviation Aluminum

Color Temperature

Warm White



Cool White




Natural White



CCT Adjustable



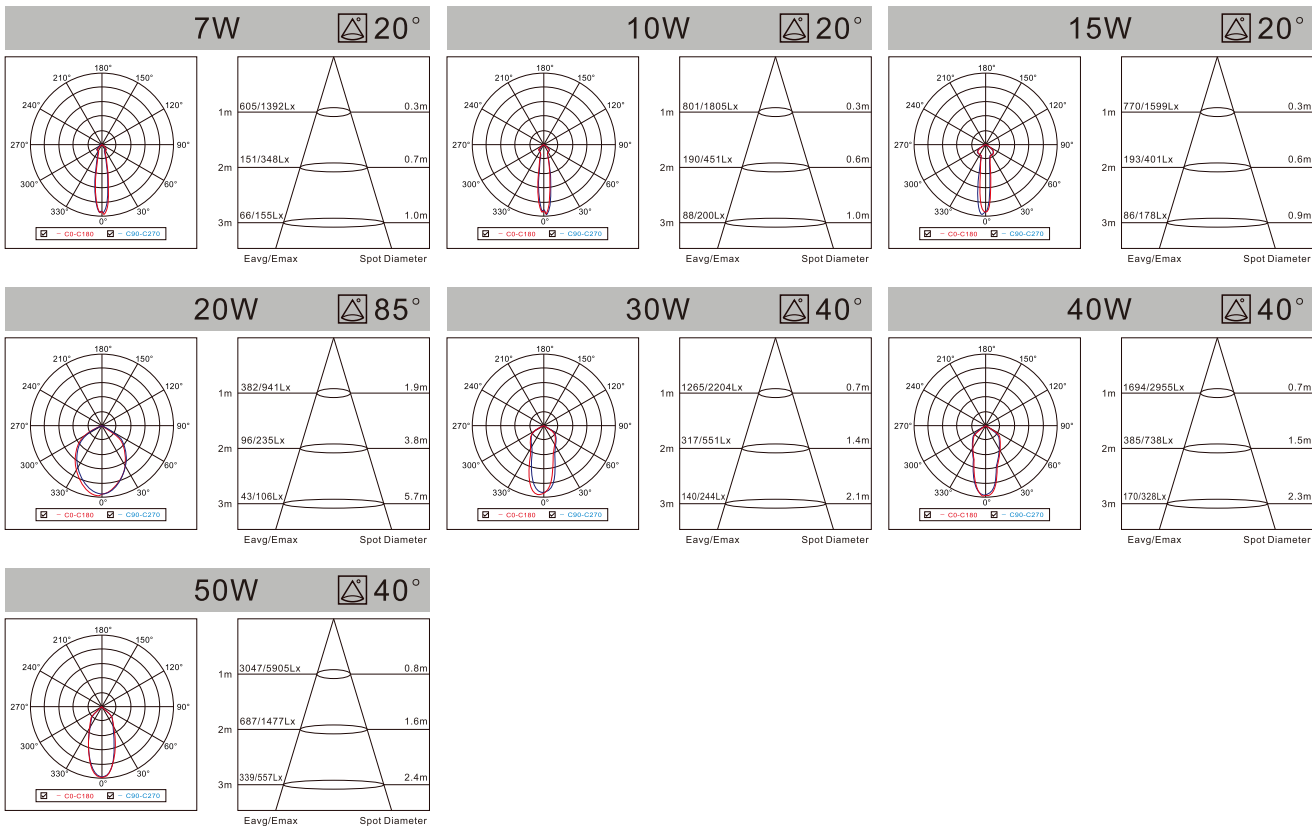

High Quality Aviation Aluminum

Warm White

Cool White

Natural White

LED DOWN LIGHT

AC:100/220-240V CRI $\geq$ 80 H:30000h

IP44



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lochgröße Cutout
LP-COB07BX01	 7W	550-650LM	N	Ø 98x46mm	 Ø 75-85mm
LP-COB10BX01	 10W	850-950LM	N	Ø 115x47mm	 Ø 95-105mm
LP-COB15BX01	 15W	1350-1450LM	N	Ø 140x49mm	 Ø 120-130mm



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lochgröße Cutout
LP-COB20BX01	 20W	1750-1900LM	N	Ø 160x50mm	 Ø 130-150mm
LP-COB30BX01	 30W	2550-2650LM	N	Ø 196x60mm	 Ø 160-185mm
LP-COB40BX01	 40W	3450-3550LM	N	Ø 225x70mm	 Ø 180-215mm
LP-COB50BX01	 50W	4350-4450LM	N	Ø 225x95mm	 Ø 180-215mm



 **EWS SERIES**
LED DOWN LIGHT

CCT Adjustable


LED DOWN LIGHT

AC:100/220-240V CRI $\geq$ 80 H:30000h

IP44



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lochgröße Cutout
LPDL-05EWS01-Y	5W	425-500LM	N	Ø 88X28mm	Ø 65-80mm
LPDL-08EWS01-Y	8W	680-720LM	N	Ø 112X30mm	Ø 90-100mm
LPDL-12EWS01-Y	12W	1020-1060LM	N	Ø 175X33mm	Ø 145-150mm
LPDL-18EWS01-Y	18W	1530-1570LM	N	Ø 222X35mm	Ø 185-200mm

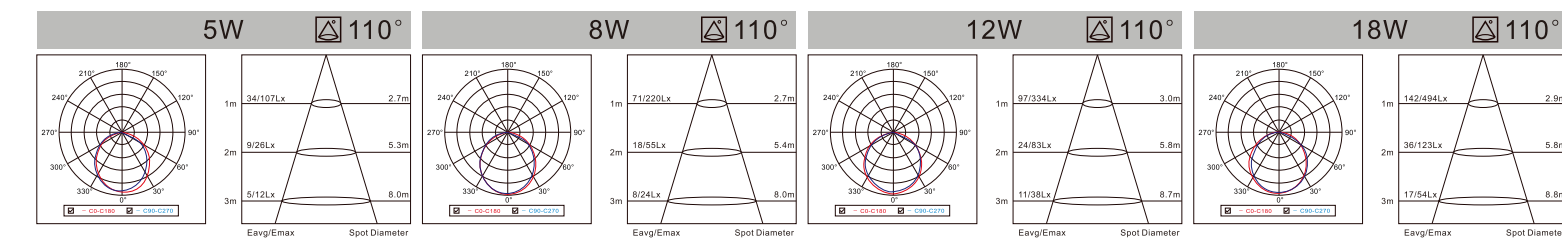

Material

UV-Resistant Plastic

Color Temperature





 EWT SERIES
LED DOWN LIGHT

LED DOWN LIGHT

AC:100/220-240V CRI $\geq$ 80 H:30000h

IP44



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lochgröße Cutout
LPDL-3+3EWT01-Y	3W+3W	Blue Light:435-479LM Major Light:1142-1256LM	N	Ø 100x26mm	Ø 70-90mm
LPDL-6+6EWT01-Y	6W+6W	Blue Light:1037-1141LM Major Light:1862-2048LM	N	Ø 140x26mm	Ø 100-130mm



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lochgröße Cutout
LPDL-12+12EWT01-Y	12W+12W	Blue Light:3556-3912LM Major Light:5212-5733LM	N	Ø 185x27mm	Ø 150-175mm
LPDL-18+18EWT01-Y	18W+18W	Blue Light:3112-3423LM Major Light:6117-6729LM	N	Ø 225x28mm	Ø 200-210mm

Material

High-Strength Cast Iron

Color Temperature

Warm White



Cool White



Natural White



Blue White





A/AS SERIES
LED DOWN LIGHT

LED DOWN LIGHT

AC:100/220-240V CRI≥80 H:30000h

IP44



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lochgröße Cutout
LP-DL07A01-YX	● 7W	550-650LM	N	Ø 98x47mm	Ø 75-85mm
LP-DL10A01-YX	● 10W	850-920LM	N	Ø 115x47mm	Ø 95-105mm
LP-DL15A01-YX	● 15W	1350-1450LM	N	Ø 140x51mm	Ø 120-130mm
LP-DL20A01-YX	● 20W	1850-1950LM	N	Ø 180x44mm	Ø 160-170mm
LP-DL30A01-YX	● 30W	2850-2950LM	N	Ø 228x44mm	Ø 205-215mm
LP-DL10A01-FX	● 10W	850-950LM	N	Ø 101x43mm	Ø 80-90mm
LP-DL15A01-FX	● 15W	1350-1450LM	N	Ø 119x43mm	Ø 100-110mm
LP-DL20A01-FX	● 20W	1850-1950LM	N	Ø 140x45mm	Ø 120-130mm



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lochgröße Cutout
LPDL-07AS01-Y	● 7W	595-635LM	N	Ø 95x26mm	Ø 75-85mm
LPDL-12AS01-Y	● 12W	1020-1060LM	N	Ø 112x28mm	Ø 90-100mm
LPDL-20AS01-Y	● 20W	1700-1740LM	N	Ø 172x28mm	Ø 145-150mm
LPDL-30AS01-Y	● 30W	2550-2590LM	N	Ø 225x28mm	Ø 180-200mm

Material

High Quality Aviation
Aluminum

Color Temperature



AS SERIES
LED DOWN LIGHT



IP65



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lochgröße Cutout
LPDL-07AS01-YW	● 7W	595-635LM	N	Ø 95x26mm	Ø 75-85mm
LPDL-12AS01-YW	● 12W	1020-1060LM	N	Ø 112x28mm	Ø 90-100mm
LPDL-20AS01-YW	● 20W	1700-1740LM	N	Ø 172x28mm	Ø 145-150mm
LPDL-30AS01-YW	● 30W	2550-2590LM	N	Ø 225x28mm	Ø 180-200mm

Material

High Quality Aviation
Aluminum

Color Temperature





 G SERIES
LED CEILING LIGHT



LED CEILING LIGHT

AC:100/220-240V CRI $\geq$ 80 H:30000h

IP44



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lochgröße Cutout
LP-CL05G01-Y	● 5W	440-480LM	N	Ø 88X42mm	Ø 75-80mm
LP-CL07G01-Y	● 7W	570-630LM	N	Ø 88X42mm	Ø 75-80mm
LP-CL10G01-Y	● 10W	800-900LM	N	Ø 120X52mm	Ø 95-100mm




Inner Ring Black/White/Silver

Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lochgröße Cutout
LP-CL03G01-Y	● 3W	180-200LM	N	Ø 52x27mm	Ø 40-45mm

Material	Color Temperature			
UV-Resistant Plastic	Warm White	Cool White	Natural White	CCT Adjustable { 3CCT 4CCT 5W/7W

G SERIES

GU10 FRAME

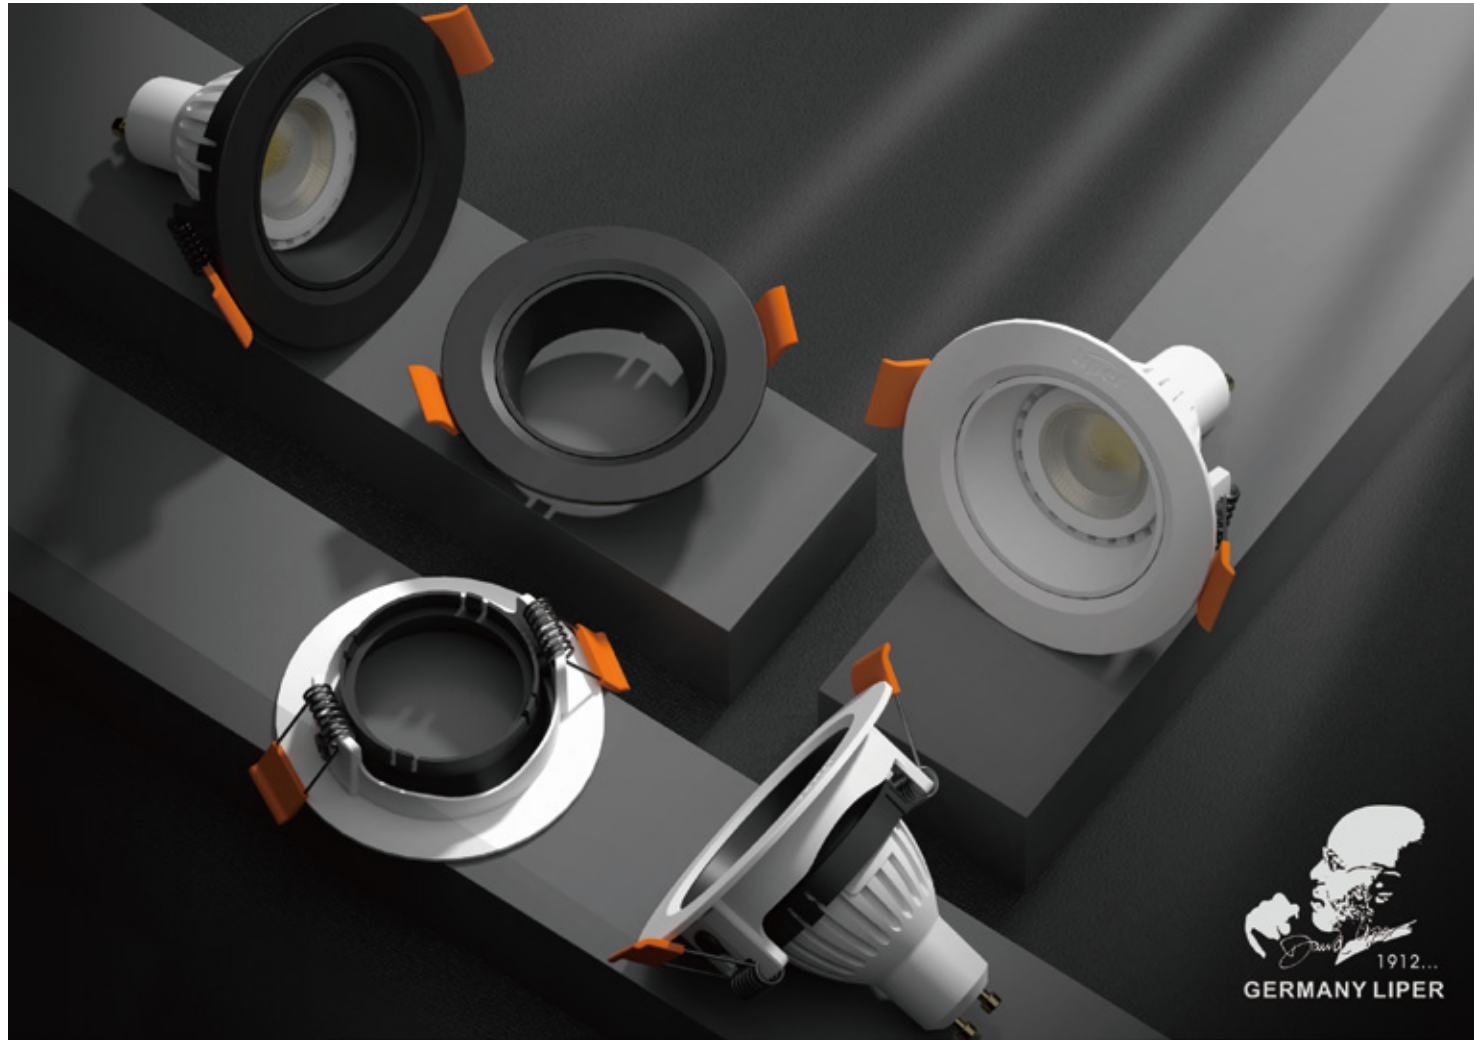


Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lochgröße Cutout
-----------------	-------------------	----------------	--------------------	------------------------------	---------------------

LPCL-GU10	/	/	N	Ø 88x27mm	Ø 75-80mm
-----------	---	---	---	-----------	-----------

Material

UV-Resistant Plastic

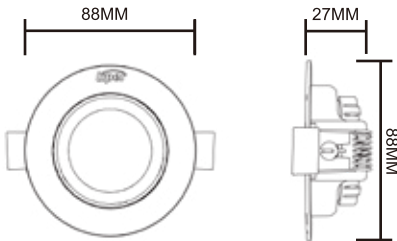

FS SERIES

LED CEILING LIGHT

LED CEILING LIGHT

AC:100/220-240V CRI≥80 H:30000h



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lochgröße Cutout
LPCOB-04FS01-YB	● 4W	Ambient Lighting	N	Ø 40x41mm	Ø 30-35mm
LPCOB-04FS01-YBR	● 4W	Ambient Lighting	N	Ø 35x41mm	Ø 30mm
LPCOB-04FS01-Y	● 4W	Ambient Lighting	N	Ø 40x41mm	Ø 30-35mm
LPCOB-04FS01-YR	● 4W	Ambient Lighting	N	Ø 35x41mm	Ø 30mm

Color Option

Blue Light
Warm White
Cool White
Natural White



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lochgröße Cutout
LPCOB-01FS01-YR	● 1W	Ambient Lighting	N	Ø 33x21mm	Ø 25mm

Material

High Quality Aviation
Aluminum

Color Temperature

Warm White



Cool White



Natural White






F SERIES
LED CEILING LIGHT

LED CEILING LIGHT

AC:100/220-240V CRI≥80 H:30000h

IP44



F01 black inner circle
F02 white inner circle



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lochgröße Cutout
-----------------	-------------------	----------------	--------------------	------------------------------	---------------------

LP-COB03F01-S	3W	220-280LM	N	Ø 72x35mm	Ø 60mm
LP-COB03F02-S	3W	220-280LM	N	Ø 72x35mm	Ø 60mm

LP-COB03F01-Y1	3W	260-310LM	N	Ø 90x35mm	Ø 68-80mm
LP-COB03F02-Y1	3W	260-310LM	N	Ø 90x35mm	Ø 68-80mm
LP-COB05F01-Y1	5W	350-360LM	N	Ø 90x35mm	Ø 68-80mm
LP-COB05F02-Y1	5W	350-360LM	N	Ø 90x35mm	Ø 68-80mm

LP-COB08F01-Y1	8W	630-720LM	N	Ø 110x50mm	Ø 90-100mm
LP-COB08F02-Y1	8W	630-720LM	N	Ø 110x50mm	Ø 90-100mm

LP-COB12F01-Y1	12W	950-1050LM	N	Ø 136x65mm	Ø 120-130mm
LP-COB12F02-Y1	12W	950-1050LM	N	Ø 136x65mm	Ø 120-130mm



LP-COB05F01-YT1	5W	310-360LM	N	Ø 90x35mm	Ø 68-80mm
LP-COB05F02-YT1	5W	310-360LM	N	Ø 90x35mm	Ø 68-80mm



10°/20°/30° Selectable

Material

High Quality Aviation
Aluminum



F SERIES
LED CEILING LIGHT

LED CEILING LIGHT

AC:100/220-240V CRI≥80 H:30000h

IP44



F01 black inner circle
F02 white inner circle



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size	Lochgröße Cutout
-----------------	-------------------	----------------	--------------------	------------------------------	---------------------

LP-COB03F01-F1	3W	260-310LM	N	Ø 90x35mm	Ø 68-80mm
LP-COB03F02-F1	3W	260-310LM	N	Ø 90x35mm	Ø 68-80mm
LP-COB05F01-F1	5W	350-360LM	N	Ø 90x35mm	Ø 68-80mm
LP-COB05F02-F1	5W	350-360LM	N	Ø 90x35mm	Ø 68-80mm

LP-COB08F01-F1	8W	630-720LM	N	Ø 110x50mm	Ø 90-100mm
LP-COB08F02-F1	8W	630-720LM	N	Ø 110x50mm	Ø 90-100mm

LP-COB12F01-F1	12W	950-1050LM	N	Ø 136x65mm	Ø 120-130mm
LP-COB12F02-F1	12W	950-1050LM	N	Ø 136x65mm	Ø 120-130mm

Material

High Quality Aviation
Aluminum





F SERIES
LED TRACK LIGHT

ALL IN ONE



2700K 4000K 6500K

 GERMANY LIPER





LED TRACK LIGHT

AC:100/220-240V CRI≥80 H:30000h



01:black 02:white

Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPTRL-20F01	20W	1950-2150LM	N	93X65X207mm
LPTRL-30F01	30W	3325-3675LM	N	94X75X207mm
LPTRL-20F02	20W	1950-2150LM	N	93X65X207mm
LPTRL-30F02	30W	3325-3675LM	N	94X75X207mm

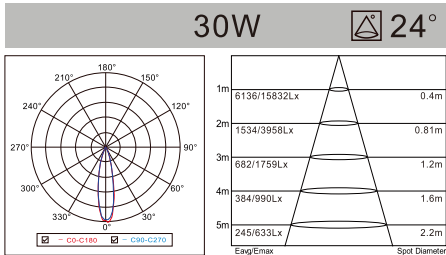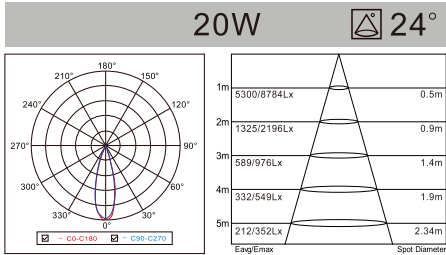

Material

High Quality Aviation
Aluminum

Color Temperature

Warm White



Cool White




Natural White



CCT Adjustable



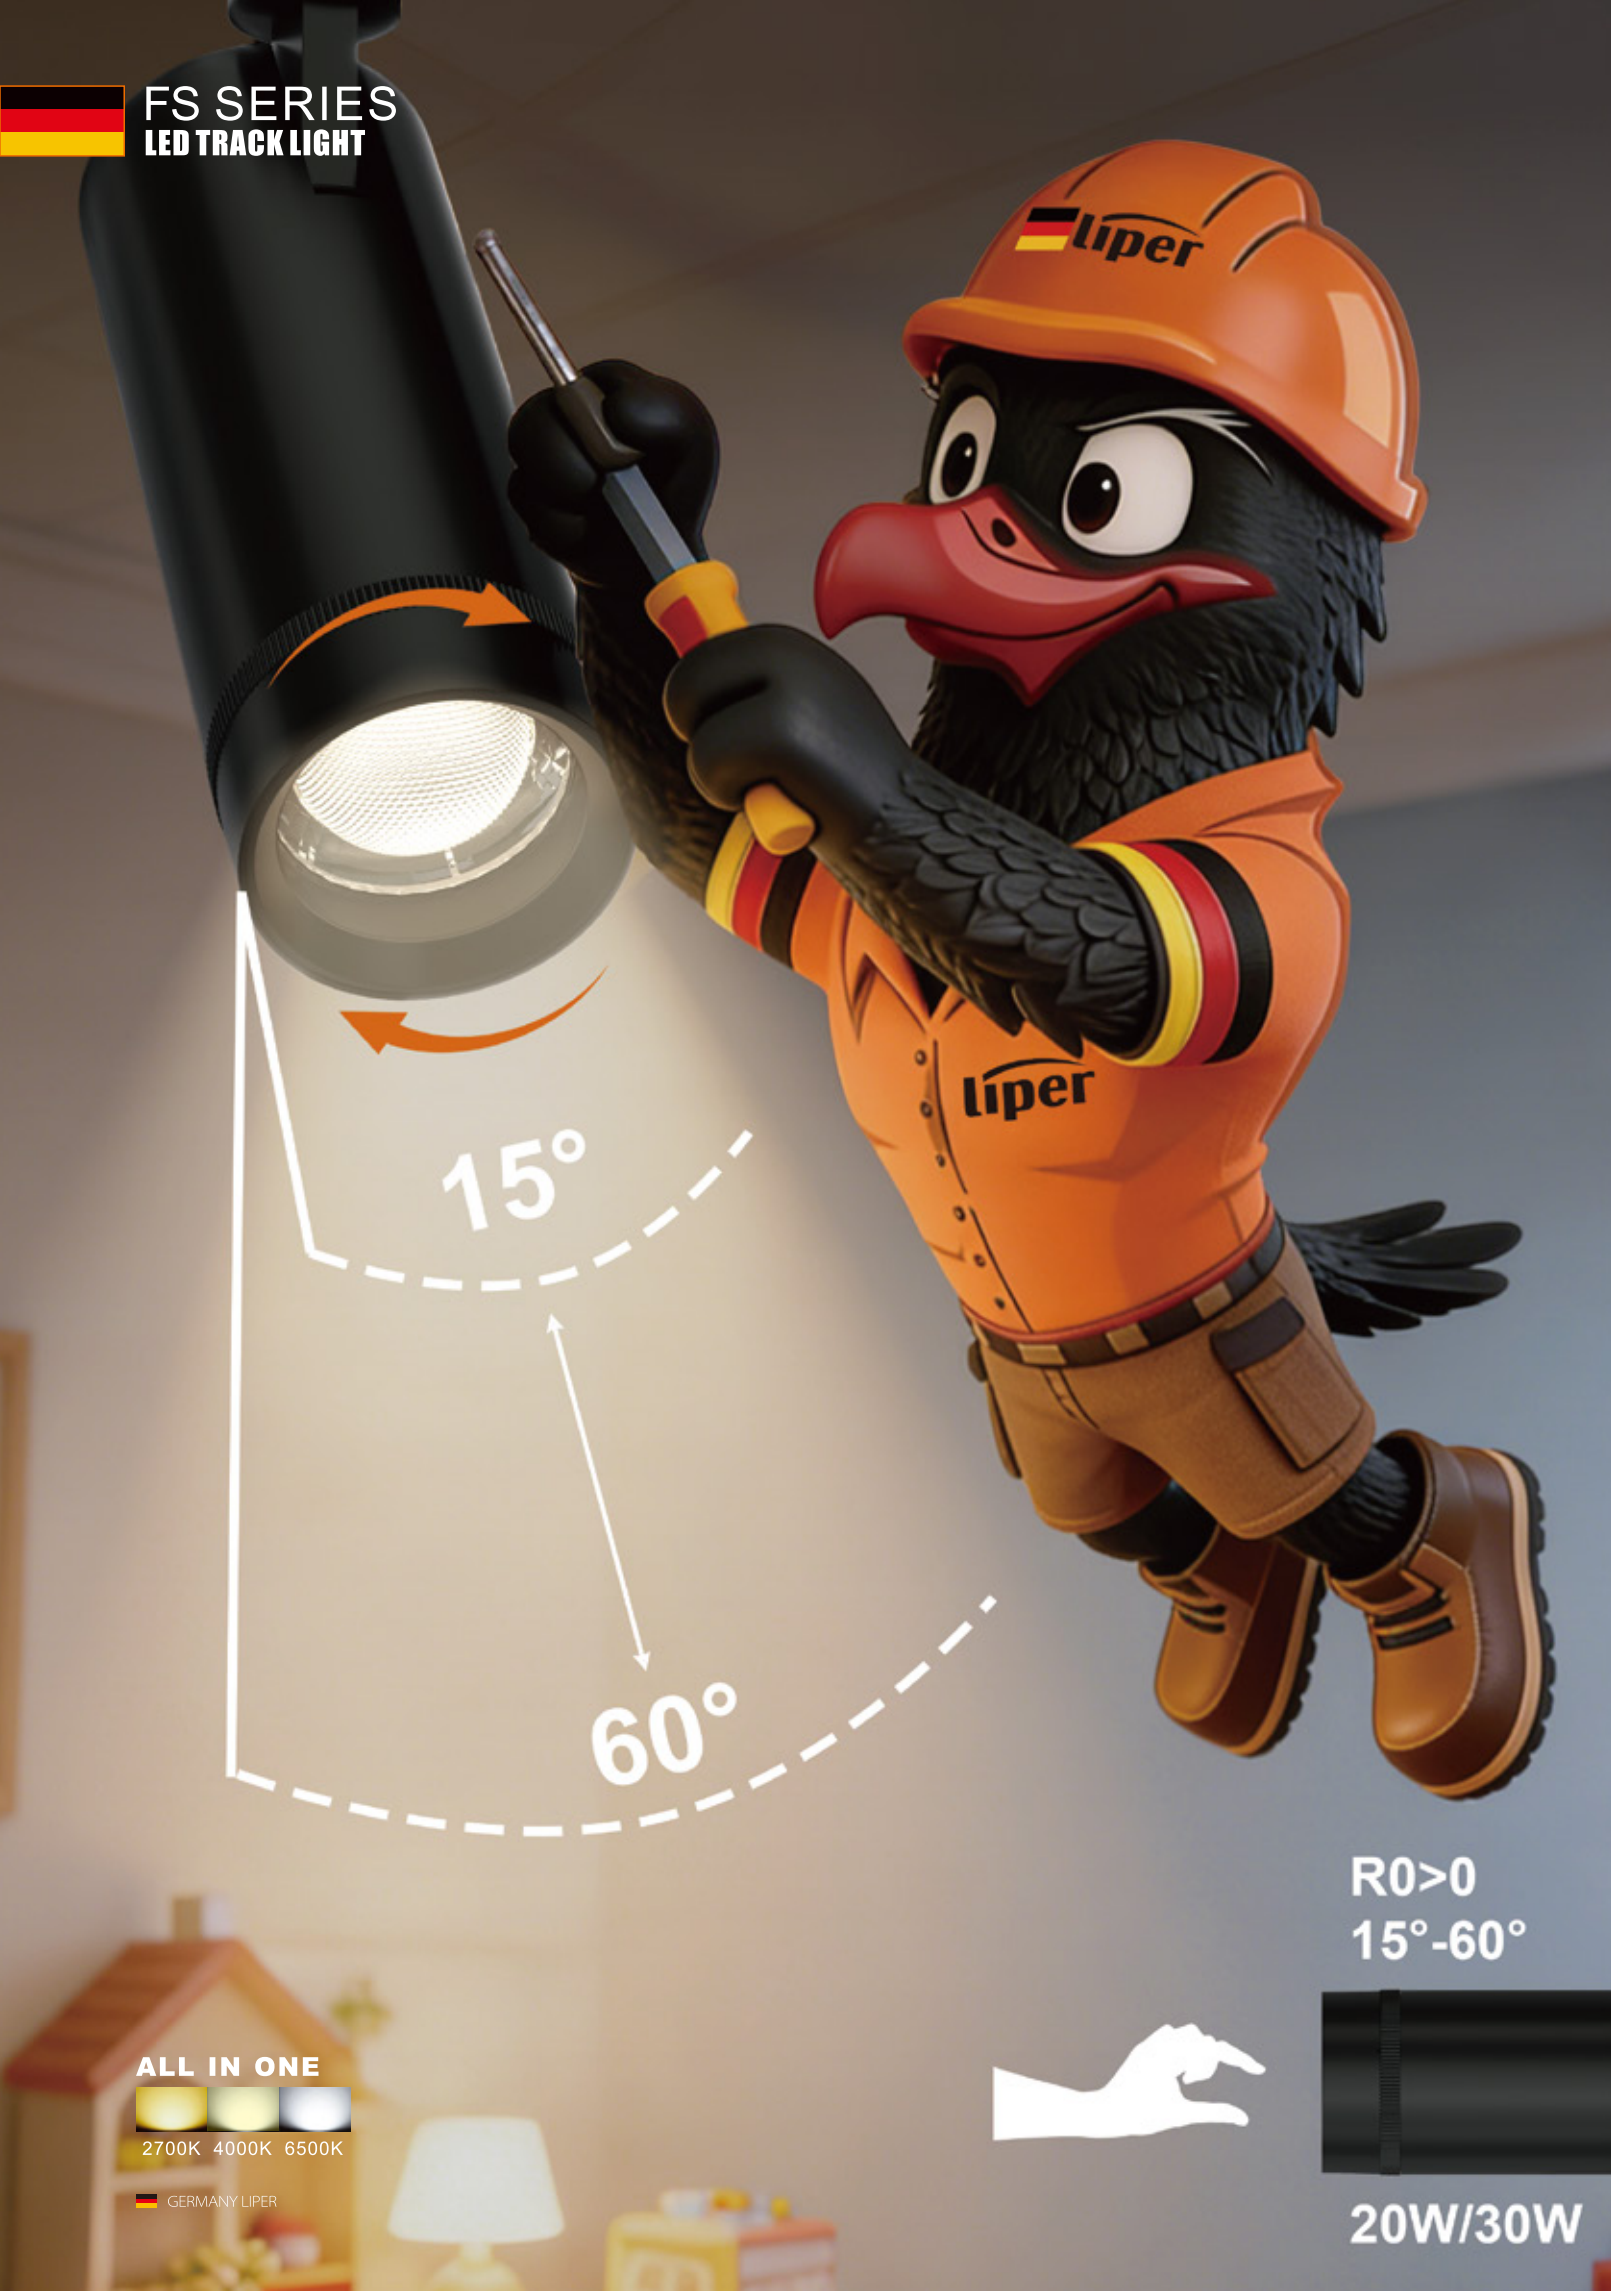

FS SERIES
LED TRACK LIGHT

ALL IN ONE



2700K 4000K 6500K

GERMANY LIPER



R0>0
15°-60°



20W/30W





LED TRACK LIGHT

AC:100/220-240V CRI≥80 H:30000h



01:black 02:white

Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPTRL-20FS01	20W	1200-1300LM	N	93X65X207mm
LPTRL-30FS01	30W	1800-1950LM	N	94X75X207mm
LPTRL-20FS02	20W	1200-1300LM	N	93X65X207mm
LPTRL-30FS02	30W	1800-1950LM	N	94X75X207mm

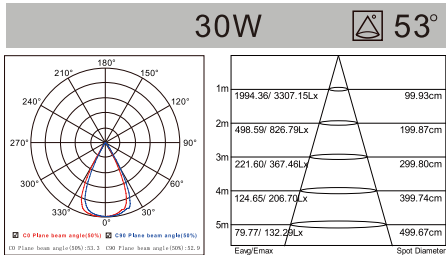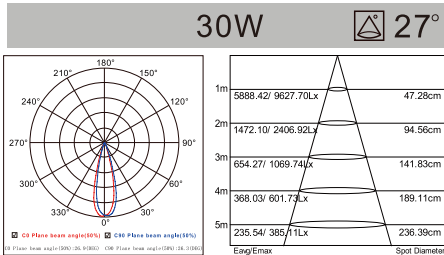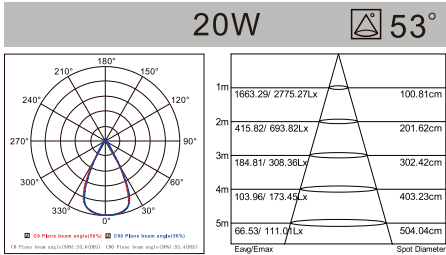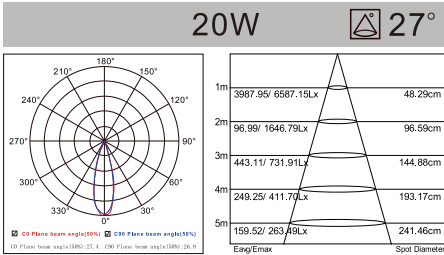

Material

High Quality Aviation
Aluminum

Color Temperature

Warm White



Cool White



Natural White



CCT Adjustable



**LED TRACK LIGHT**

AC:100/220-240V CRI≥80 H:30000h



01:black 02:white

Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPTRL-10FT01	10W	600-650LM	N	193*70*49mm
LPTRL-20FT01	20W	1200-1300LM	N	223*70*63mm
LPTRL-30FT01	30W	1800-1950LM	N	257*70*63mm
LPTRL-2*20FT01	2*20W	2400-2600LM	N	221*174*63mm
LPTRL-2*30FT01	2*30W	2400-2600LM	N	254*174*63mm



01:black 02:white

Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPTRL-10FT01	10W	600-650LM	N	190*107*49mm
LPTRL-20FT01	20W	1200-1300LM	N	223*107*63mm
LPTRL-30FT01	30W	1800-1950LM	N	256*107*63mm

MaterialHigh Quality Aviation
Aluminum**Color Temperature**

Warm White



Cool White



Natural White



CCT Adjustable








LED LOUVER FITTING

AC:100/220-240V CRI≥80 H:30000h


50W 



40W 



40W/50W

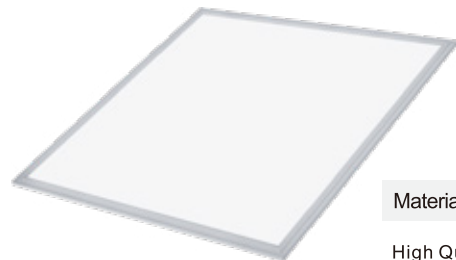


Material



High Quality Aviation
Aluminum

Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LP-LF60A60 40W	40W	3680-3960LM	N	600X7X600mm
LP-LF60A60 50W	50W	4780-4950LM	N	600X7X600mm

40W 



50W 

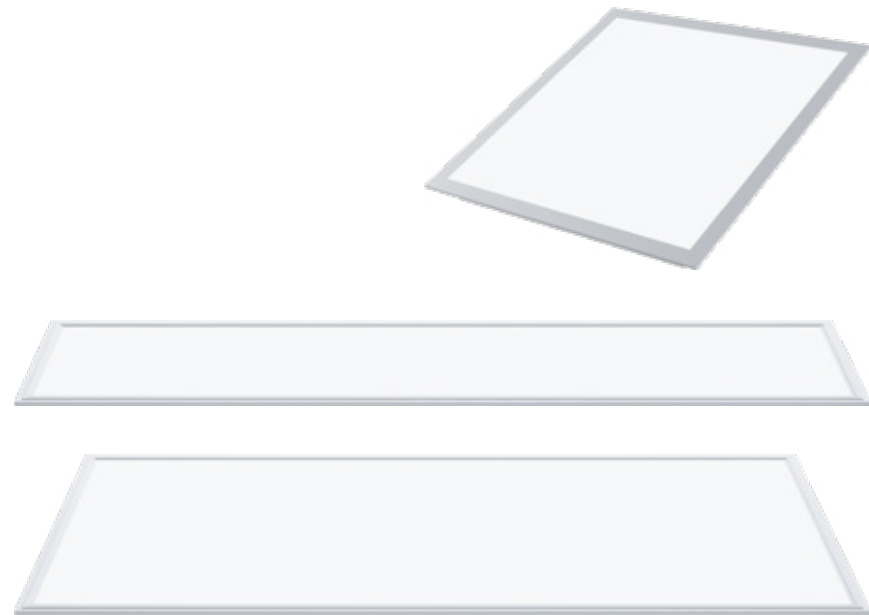

Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPLF-60EF60 40W	40W	4200-4400LM	N	600X600X30mm
LPLF-60EF60 50W	50W	5250-5500LM	N	600X600X30mm
LPLF-120EF60 80W	80W	8400-8800LM	N	1200X600X30mm
LPLF-120EF30 40W	40W	4200-4400LM	N	1200X300X30mm

Material

High-Strength
Cast Iron

Color Temperature

Warm White



Cool White



Natural White



CCT Adjustable





straight connection



"I" shape connector



Right angle connection



"L" shape connector

LED TUBE


AC:100/220-240V CRI $\geq$ 80 H:30000h



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPTL-08D04	8W	600-680LM	N	600X30X37mm
LPTL-16D04	16W	1260-1350LM	N	1200X30X37mm
LPTL-16D04-2	16W	1260-1350LM	N	600X37X63mm
LPTL-32D04-2	32W	2550-2670LM	N	1200X37X63mm


8W-LPTL-08D04

125°

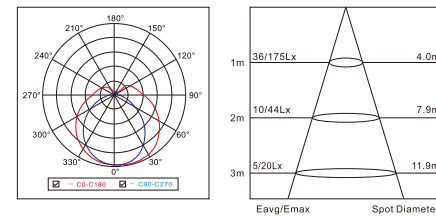


16W-LPTL-16D04

125°

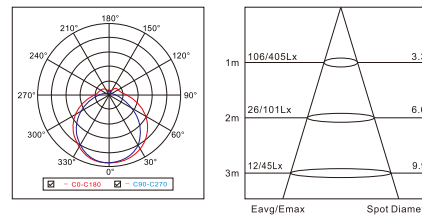



16W-LPTL-16D04-2

130°

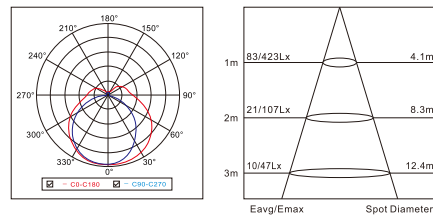

32W-LPTL-32D04-2

130°

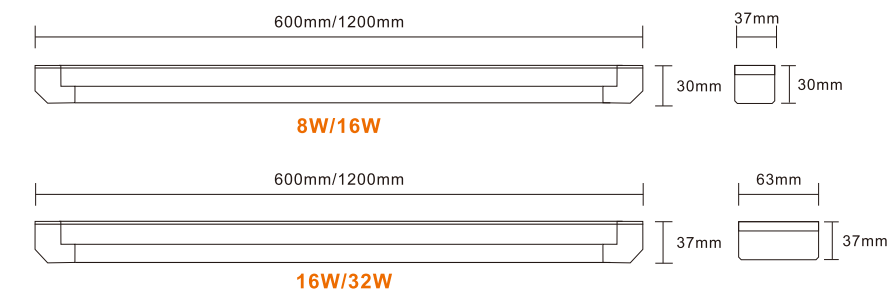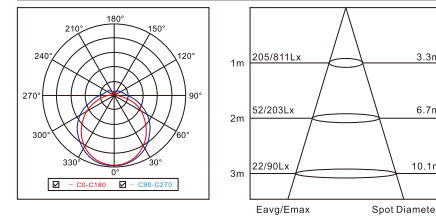

Material

High-Strength
Cast Iron

Color Temperature

Warm White



Cool White



Natural White







T8 SERIES
LED TUBE

LED TUBE

AC:100/220-240V CRI≥80 H:30000h

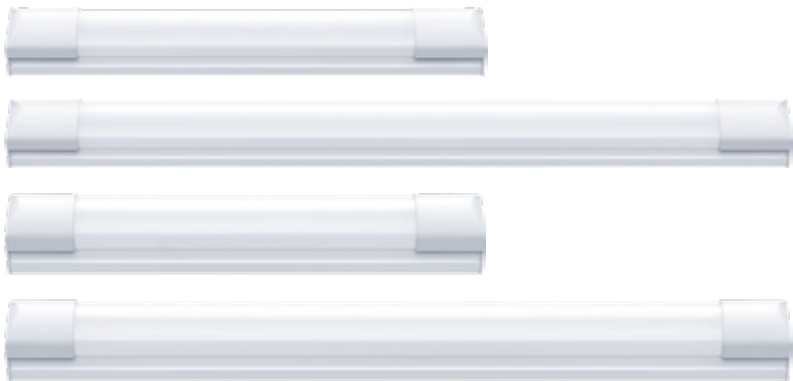

Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPTL-08DS04	8W	600-680LM	N	588X26X30mm
LPTL-16DS04	16W	1260-1350LM	N	1198X26X30mm
LPTL-18DS04-2	18W	1420-1530LM	N	588X36X56mm
LPTL-36DS04-2	36W	2880-2950LM	N	1198X36X56mm

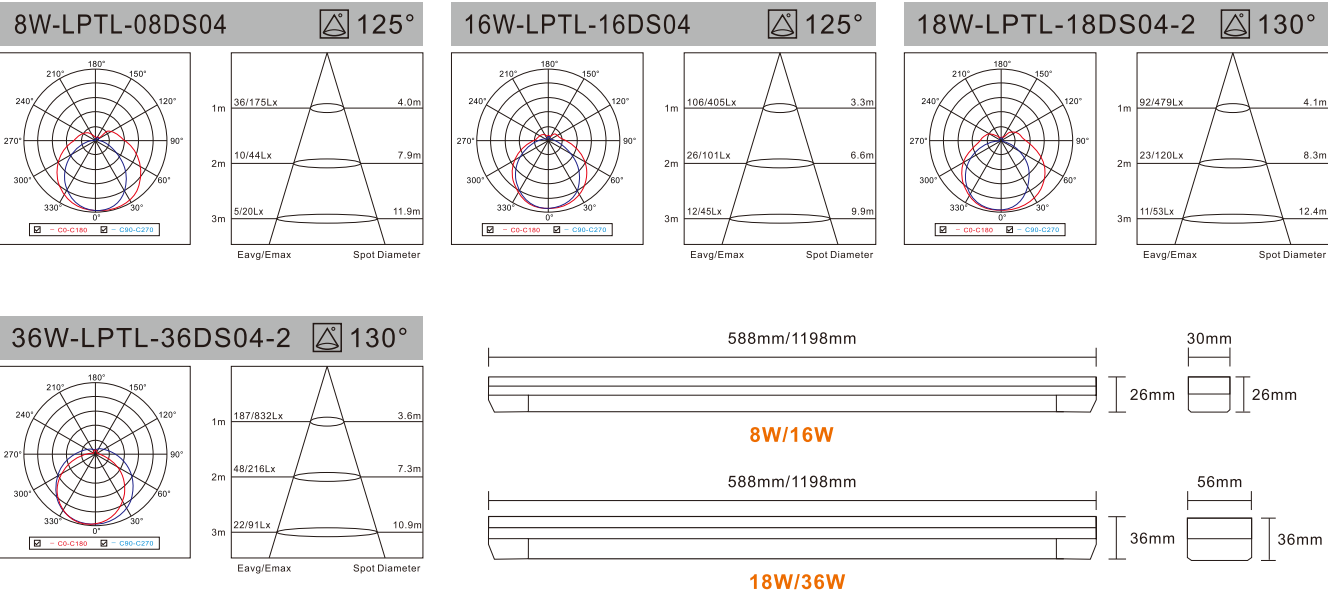

Material

High-Strength
Cast Iron

Color Temperature








T8 SERIES
LED TUBE

LED TUBE

AC:100/220-240V CRI≥80 H:30000h



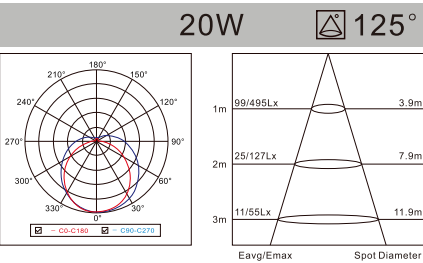
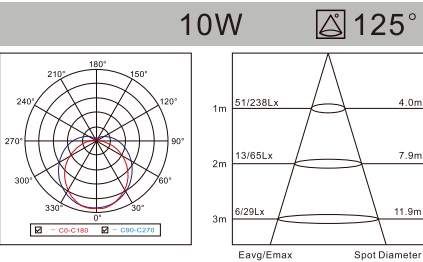


10W/20W/25W

Material

High Quality Aviation Aluminum

Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPTL10C02	10W	800-900LM	N	Ø 26x600mm
LPTL20C02	20W	1600-1800LM	N	Ø 26x1200mm

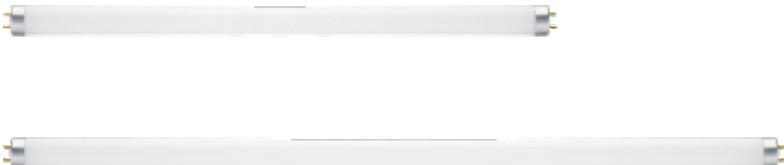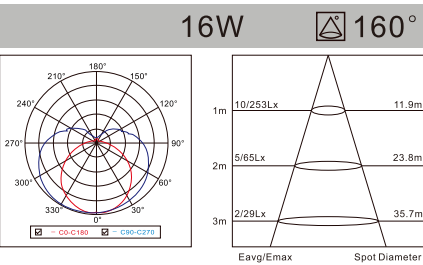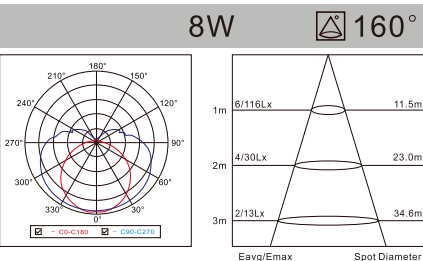

8W/16W

Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPTL-09E02	9W	820-980LM	N	Ø 26x600mm
LPTL-18E02	18W	1640-1960LM	N	Ø 26x1200mm

Material

Glass

Color Temperature

Warm White





Cool White



Natural White




LIGHTING
FIXTURE

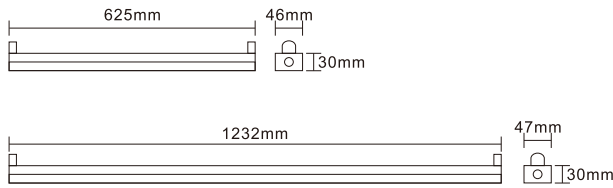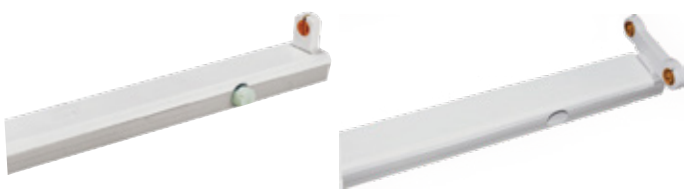

Material

High-Strength Cast Iron


Modell Model	Produktgröße Product Size
CW.A 600mm Single Tube	625x46x30mm
CW.A 1200mm Single Tube	1232x47x30mm
CW.B 600mm Double Tube	625x46x30mm
CW.B 1200mm Double Tube	1232x47x30mm

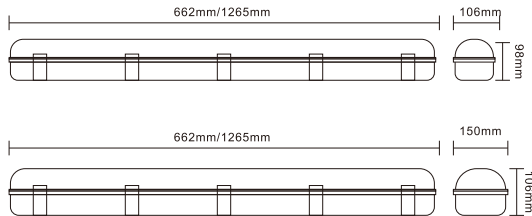

Material

UV-Resistant Plastic

Modell Model	Produktgröße Product Size
SY6118-H 600mm Single Tube	662x98x106mm
SY6136-H 1200mm Single Tube	1265x98x106mm
SY6218-H 600mm Double Tube	662x106x150mm
SY6236-H 1200mm Double Tube	1265x106x150mm



Material

UV-Resistant Plastic


Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
SY6120-H(LED)	1X20W	1650-1750LM	N	600X70X95mm
SY6140-H(LED)	1X40W	3350-3450LM	N	1200X70X95mm
SY6160-H(LED)	1X60W	5550-5650LM	N	1500X70X95mm



A SERIES
LED STRIP LIGHT

LED STRIPLIGHT AC: 220-240V CRI≥80 H:30000h


IP65
AC 220-240V

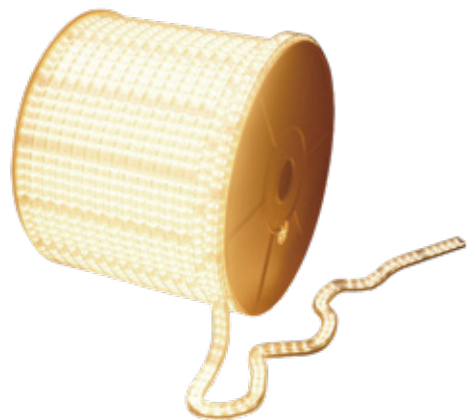

Power Supply
Carry 50M

Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPSL-7A01	● 7W/M	700LM/M	N	8mm
LPSL-12A01	● 12W/M	1200LM/M	N	11mm

IP20
DC24V

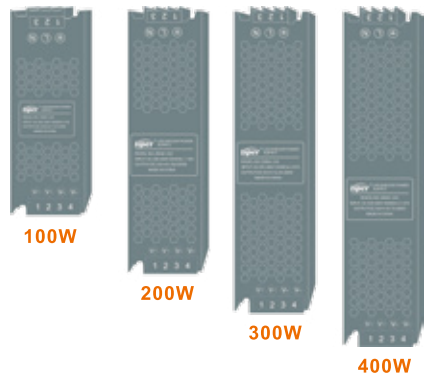

Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPSTL-20A01	● 20W/M	2400LM/M	N	10mm
LPSTL-25A01	● 25W/M	3000LM/M	N	15mm
LPSTL-30A01	● 30W/M	3600LM/M	N	28mm/30mm
LPSTL-40A01	● 40W/M	4800LM/M	N	40mm

Material

FPC Flexible
Chip Board

Color Temperature

Warm White



Cool White



Natural White



A SERIES
LED STRIP LIGHT

LED STRIPLIGHT AC: 220-240V CRI≥80 H:30000h

IP20
DC24V
COB



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPSTL-11A01	● 11W/M	1100LM/M	N	8MM

IP68
DC24V



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LPSTL-10A01	● 10W/M	1250LM/M	N	8MM

Material

FPC Flexible
Chip Board

Color Temperature

Warm White



Cool White



Natural White





CX SERIES
LED Magnetic Track light

CX SERIES
LED Magnetic Track light

LED MAGNETIC LIGHT

DC48V CRI≥90 H:30000h

Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LP-CX-20CB-FG-10	10W	850-935LM	N	300X22X45mm
LP-CX-20CB-FG-20	20W	1700-1785LM	N	600X22X45mm
LP-CX-20CB-FG-30	30W	2550-2635LM	N	900X22X45mm
LP-CX20CB-FG-40	40W	3400-3513LM	N	1200X22X45mm

Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LP-CX-20CB-GS-6	6W	510-595LM	N	112X22X45mm
LP-CX-20CB-GS-12	12W	1020-1105LM	N	220X22X45mm
LP-CX-20CB-GS-18	18W	1530-1615LM	N	328X22X45mm
LP-CX-20CB-GS-24	24W	2040-2125LM	N	432X22X45mm
LP-CX-20CB-GS-36	36W	3060-3187LM	N	600X22X47mm

Material

High Quality Aviation Aluminum

Color Temperature

Warm White

Cool White

Natural White

CCT Adjustable

Liper Light 123/124



CX SERIES
LED Magnetic Track light

LED MAGNETIC LIGHT DC48V CRI≥90 H:30000h



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LP-CX-20CB-DG2-10	10W	850-935LM	N	46X162mm
LP-CX-20CB-DG2-20	20W	1700-1785LM	N	56X196mm
LP-CX-20-HS-12	12W	1020-1080LM	N	40X300mm



Modell Model	Leistung Power	Lumen Lumen	Verdunklung DIM	Produktgröße Product Size
LP-CX-20CB-GS-ZD-6	6W	510-595LM	N	112X22X102mm
LP-CX-20CB-GS-ZD-12	12W	1020-1105LM	N	220X22X102mm
LP-CX-20CB-GS-ZD-18	18W	1530-1615LM	N	330X22X102mm
LP-CX-20CB-GS-ZD-24	24W	2040-2125LM	N	438X22X102mm

Material

High Quality Aviation
Aluminum

Color Temperature



4 installation methods

1/2/3meters

